


2023 NEW 2024

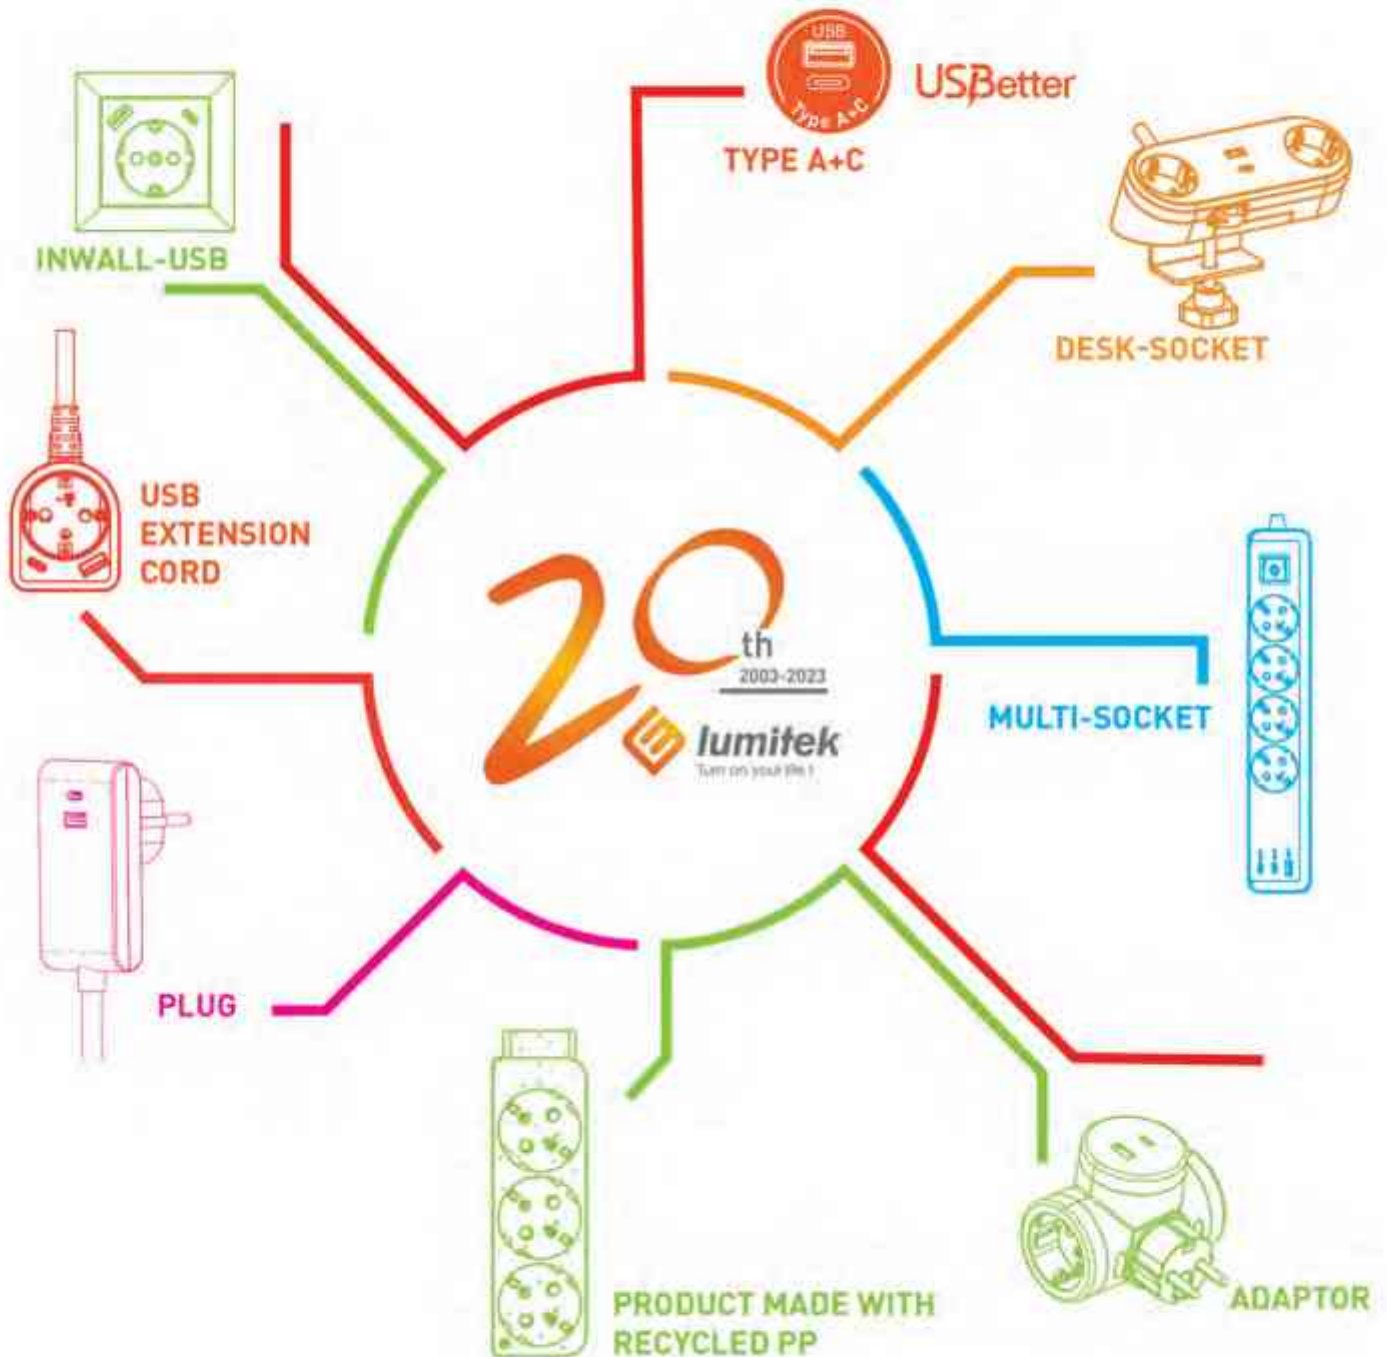

ABOUT LUMITEK

Lumitek, as the dedicated manufacturer of electrical and LED luminary products, has been evolving and innovating to stay tuned with the evolution of market and technologies since its inception in 1998.

An in-house laboratory, with all necessary testing equipment as LVD/EMC/ROHS, has been built to support our quality assurance. Automatic and semi-automatic production facilities are being introduced, combined with lean production management. Quality and cost-effective manufacturing is always our pursuit.

The technologies are changing and developing nowadays, which are highly concerned with our electrical and LED luminary industry. Our R&D team is characterized by professionalism, innovation and openness to new technologies as USB charging, smart control, energy efficiency and environment sustainability etc. Hundreds of patents, safety certificates, and industrial design awards are the proud outcomes. The integration of various resources and capabilities within and across the industry would also serve our customer needs with best possible solution.


The ever unchanged is our philosophy to create lasting value to our customers and help them to be competitive and differentiated from mass competition. Mutual sustainable developing, rather than simply buy and sell, is what we seek with our valued customers.



Welcome and enjoy the experience with Lumitek.



Laboratory

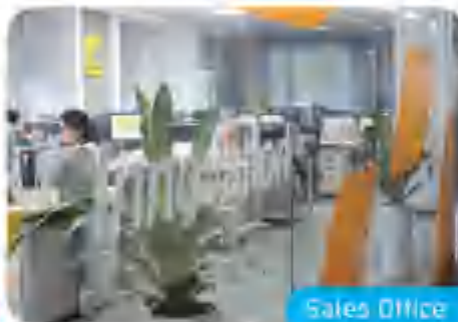

Sales Office



Automated equipment





PCBA Workshop



Injection



Assembling line

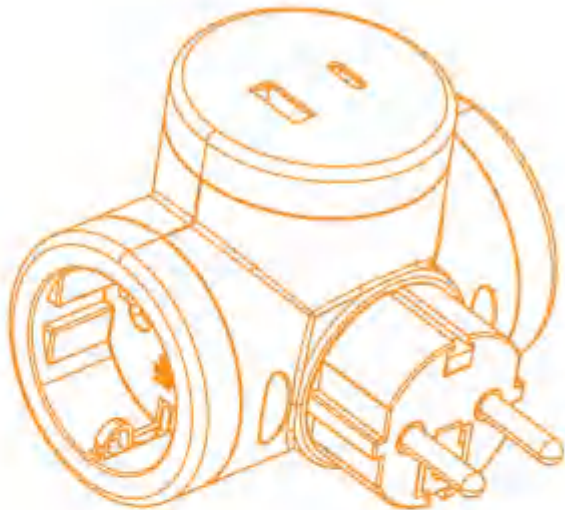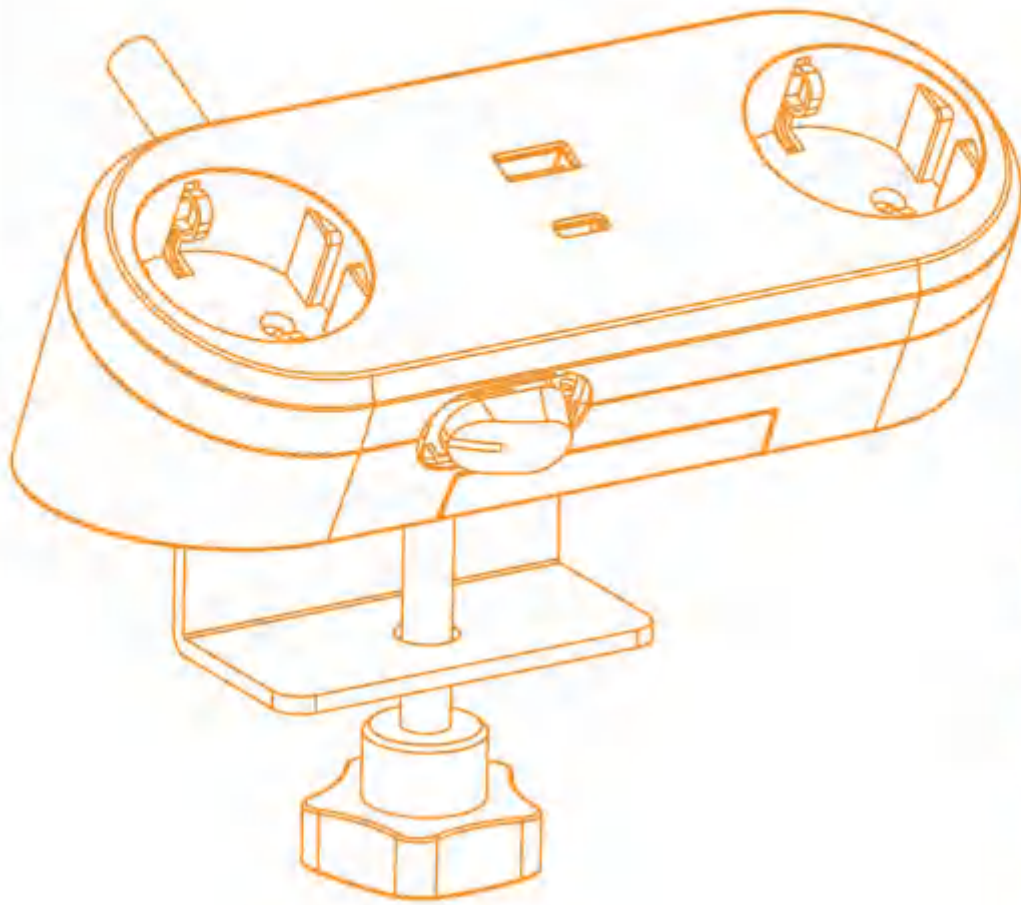

GERMAN TYPE

PD 65W

Power 65



Power: Max. 3680W 16A/250V-
Cable: H05VV-F 3G 1.5mm²

Exclusive in Germany

Power 65



NEW CE

Schuko type with shutter, with button switch



671112-U6C



671114-U6C




Model	Outlets quantity
671112-U6C	2
671114-U6C	4

Full charge MacBook in only 2 hours









3-Ports Fast Charge 65W Max




Single-Cable Charging

-  **PD-1** 65W output up to
-  **PD-2** 65W output up to
-  **USB-A** 18W output up to

2-Cable Charging

-  **PD-1**  **PD-2** 45W+20W output up to
-  **PD-1**  **USB-A** 45W+18W output up to
-  **PD-2**  **USB-A** 15W Max output up to

3-Cable Charging

-  **PD-1** 45W output up to
-  **PD-2**  **USB-A** 15 W output up to

Incredible Compatibility

Mobile Phones



Laptops



Tablet





Handheld Game Player



Bluetooth Headset





	<p>PD/QC 3.0 36W</p> <p>49%</p> <p>iPhone to about 60% in 30 mins</p>
	<p>Traditional 5V/1A charge</p> <p>20%</p> <p>iPhone to about 20% in 30 mins</p>

Power:Max.3680W 16A/250V~
Cable:H05VV-F,3G 1.5mm²

Power 36



Schuko type with shutter, with button switch

NEW CE



621113-U9C



621115-U9C

Model	Outlets quantity
621113-U9C	3
621115-U9C	5




C1/C2: PD3.0, PPS, QC2.0/3.0/3.0+, CHARGE TURBO 27W, FCP, Apple2.4, BC1.2, AFC









A: QC2.0/3.0/3.0+, FCP, Apple2.4, BC1.2, AFC

3-Ports Fast Charge 36W Max

Single-Cable Charging

-  PD-1 36W output up to
-  PD-2 36W output up to
-  USB-A 36W output up to

2-Cable Charging

-  PD-1  USB-A 15W Max output up to
-  PD-1  PD-2 15W Max output up to
-  PD-2  USB-A 15W Max output up to

3-Cable Charging

-  PD-1
-  PD-2
-  USB-A
- 15W Max output up to



PATENTED

With Table Mount

Without Table Mount



Easily Screw Clamp For Table Thicknesses **33**mm Max.

Omni-DeskTop



NEW CE

Schuko desk type with shutter, with switch




Slide-out tray for supporting the phone/Ipad

Model	USB Charging	Outlets quantity	switch
D6202-U4C	A+C: 5V 3.4A Max C: PD 20W MAX A: QC 18W MAX	2	✓
D6202-U3C	A+C: 5V 3.4A Max C: 5V 3A A: 5V 2.4A	2	✓



NEW

Maggie Powerstrip Box

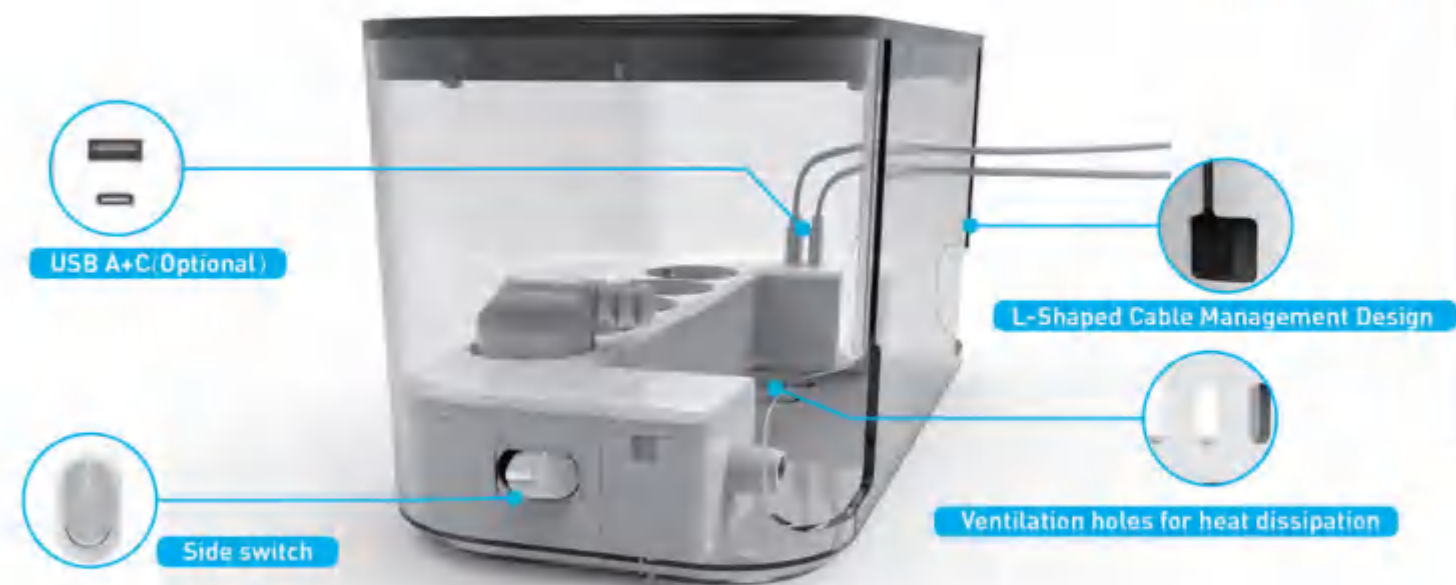

Maggie Powerstrip Box



Model	USB Charging	Switch	Outlets quantity
616005	x	✓	5
616005-2U3C	A+C:5.0V 3.4A Max C:5.0V 3.0A A:5.0V 2.4A Max	✓	5
616005-2U4C	A+C:5.0V 3.0A Max C:PD 20W Max A:QC 20W Max	✓	5

PowerArt

New style life



PowerArt



NEW



Schuko type with shutter, with button switch, with/without USB

63114U2

63114U3

631113

631114

631115

631116

Model	USB Charging	Switch	Outlets quantity
631114-U2	A+C: 5V 3.4A Max C: PD 18W MAX A: QC 18W MAX	√	4
631114-U3	A+A+A,5V 2.4A Max	√	4
631113	x	√	3
631114	x	√	4
631115	x	√	5
631116	x	√	6



Ara socket(TYPE C)



NEW CE

Schuko type with shutter, with button switch



661115-3U4C

Model	USB Charging	Outlets quantity
661115-3U4C	A+A+C: 5.0V 4.8A Max C:PD 45W Max A:QC 18W Max A+A:5.0V 4.8A Max	5

Ara socket



NEW



Schuko type with shutter, with button switch



Model	USB Charging	Outlets quantity
661114	×	4
661113-2U2	A+A: 5.0V 2.4A Max	3
661113-2U3	A+A: 5.0V 3.4A Max	3
661113-3U2	A+A+A: 5.0V 2.4A Max	3
661113-3U3	A+A+A: 5.0V 3.4A Max	3

Model	USB Charging	Outlets quantity
661116	×	6
661115-2U2	A+A: 5.0V 2.4A Max	5
661115-2U3	A+A: 5.0V 3.4A Max	5
661115-3U2	A+A+A: 5.0V 2.4A Max	5
661115-3U3	A+A+A: 5.0V 3.4A Max	5

Ara socket(SG)



NEW



1/Schuko type with shutter, with button switch, with surge protection


2/Surge protection Type 3 SPD
 Uoc:3KV(L-N,L/N-PE)
 Up:1.5KV(L/N-PE),1.2KV(L-N)




Model	USB Charging	Outlets quantity
661114SG	×	4
661113-2U2SG	A+A: 5.0V 2.4A Max	3
661113-2U3SG	A+A: 5.0V 3.4A Max	3
661113-3U2SG	A+A+A: 5.0V 2.4A Max	3
661113-3U3SG	A+A+A: 5.0V 3.4A Max	3

Model	USB Charging	Outlets quantity
661116SG	×	6
661115-2U2SG	A+A: 5.0V 2.4A Max	5
661115-2U3SG	A+A: 5.0V 3.4A Max	5
661115-3U2SG	A+A+A: 5.0V 2.4A Max	5
661115-3U3SG	A+A+A: 5.0V 3.4A Max	5





PD/QC 3.0 18W
iPhone to about 50% in 30 mins



Traditional 5V/1A charge
iPhone to about 20% in 30 mins

Dedicatedly Designed



Lighted Switch



USB A+C: 5V 3A Max



Ventilation Hole



Quick Charge, Type C PD



Schuko Socket



Schuko Socket with shutter
Cable: H05VV-F 3G 1.0/1.5mm²



Model	USB Charging	Switch	Outlets quantity
611113-2U2	A: 5.0V 2.4A Max	✓	3
611113-2U3	A: 5.0V 3.4A Max	✓	3
611115-2U2	A: 5.0V 2.4A Max	✓	5
611115-2U3	A: 5.0V 3.4A Max	✓	5
611013	×	×	3
611014	×	×	4
611015	×	×	5
611016	×	×	6
611113	×	✓	3
611114	×	✓	4
611115	×	✓	5
611116	×	✓	6

Schuko Socket (Type C)



NEW CE

Schuko Socket with shutter
Cable: H05VV-F 3G 1.0/1.5mm²



Model	USB Charging	Switch	Outlets quantity
611113-2U3C	A+C: 5.0V 3.0A Max C: 5.0V 3.0A A: 5.0V 2.4A Max	✓	3
611113-2U4C	A+C: 5.0V 3.0A Max C: PD 18W Max A: QC 18W Max	✓	3
611115-2U3C	A+C: 5.0V 3.0A Max C: 5.0V 3.0A A: 5.0V 2.4A Max	✓	5
611115-2U4C	A+C: 5.0V 3.0A Max C: PD 18W Max A: QC 18W Max	✓	5

Schuko Socket (Rewirable)



Schuko Socket with shutter



Model	Outlets quantity
611003	3
611004	4
611006	6

Schuko Socket



CE

Schuko Socket with shutter
Cable: H05VV-F 3G 1.0/1.5mm²



Model	USB Charging	Switch	Outlets quantity
6112014	×	×	4
6112013-2U2	A: 5.0V 2.4A Max	×	3
6112113	×	✓	3

PATENTED



Push Switch



Can be screwed to the wall



USB 5V 2.4A



Rewiring available



For Plug

Power:Max.3500W 16A/230V-

Schuko Socket



Schuko Socket with shutter
Cable: H05VV-F 3G 1.5mm²

Model	USB Charging	Switch	Outlets quantity
C641113UC-2	A+A: 5.0V 2.4A Max	✓	3
C641115UC-2	A+A: 5.0V 2.4A Max	✓	5

Model	Outlets quantity	Switch	Model	Outlets quantity	Switch
C641013	3	x	C641113	3	✓
C641014	4	x	C641114	4	✓
C641015	5	x	C641115	5	✓
C641016	6	x	C641116	6	✓

Schuko Socket (Rewirable)



Schuko Socket with shutter

Model	Outlets quantity	Switch	Model	Outlets quantity	Switch
C641003	3	x	C641103	3	✓
C641004	4	x	C641104	4	✓
C641005	5	x	C641105	5	✓
C641006	6	x	C641106	6	✓

PATENTED



Clip-on working places

Basic Version



Socket with 3 outlets, with shutter
Power:Max.3680W 16A/250V~



Model	Outlets quantity	Cable
C6103	3	H05VV-F 3G 1.5mm ²

Clip with Switch

NEW



Schuko type with shutter, with switch



Model	Outlets quantity	Cable	Switch
C6112	2	H05VV-F 3G 1.5mm ²	✓

Clip with USB

NEW



Schuko type with shutter, with USB



Model	Outlets quantity	Cable	USB Specification
C6102-U4C	2	H05VV-F 3G 1.5mm ²	A+C:5V3.4A Max C:PD20W A:QC18W



Small clean and tidy



Spaced outlet



Fix on the wall with screw



Save space



Energy-saving foot switch




Energy-saving Foot switch

- Robust hand/foot switch with integrated indicator light.
- With blue ring LED indicator
- 10A 250V- two-pole switch

Euro Socket (Slim)



Socket with 4 outlets, with shutter

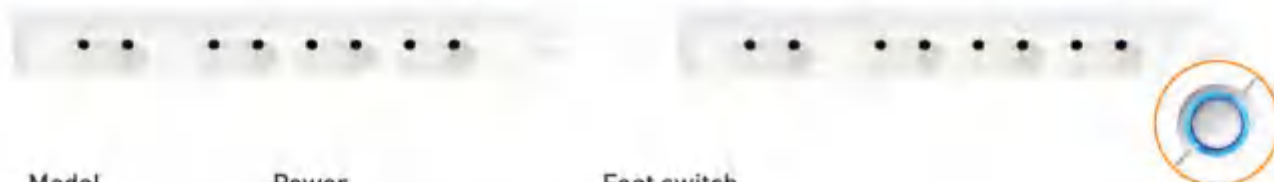


Model	Power	Foot switch
612014	2.5A/230V- Max:2300W 10A/250V-	×
612014F	2.5A/230V- Max:2300W 10A/250V-	✓

Spanish Euro Socket (Slim)




Socket with 4 outlets, with shutter

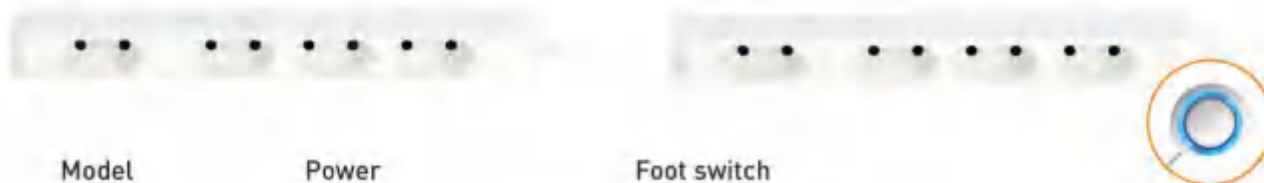

Model	Power	Foot switch
622014	10A/230V- MAX:2300W	×
622014F	10A/230V- MAX:2300W	✓

PATENTED


Gaming Series

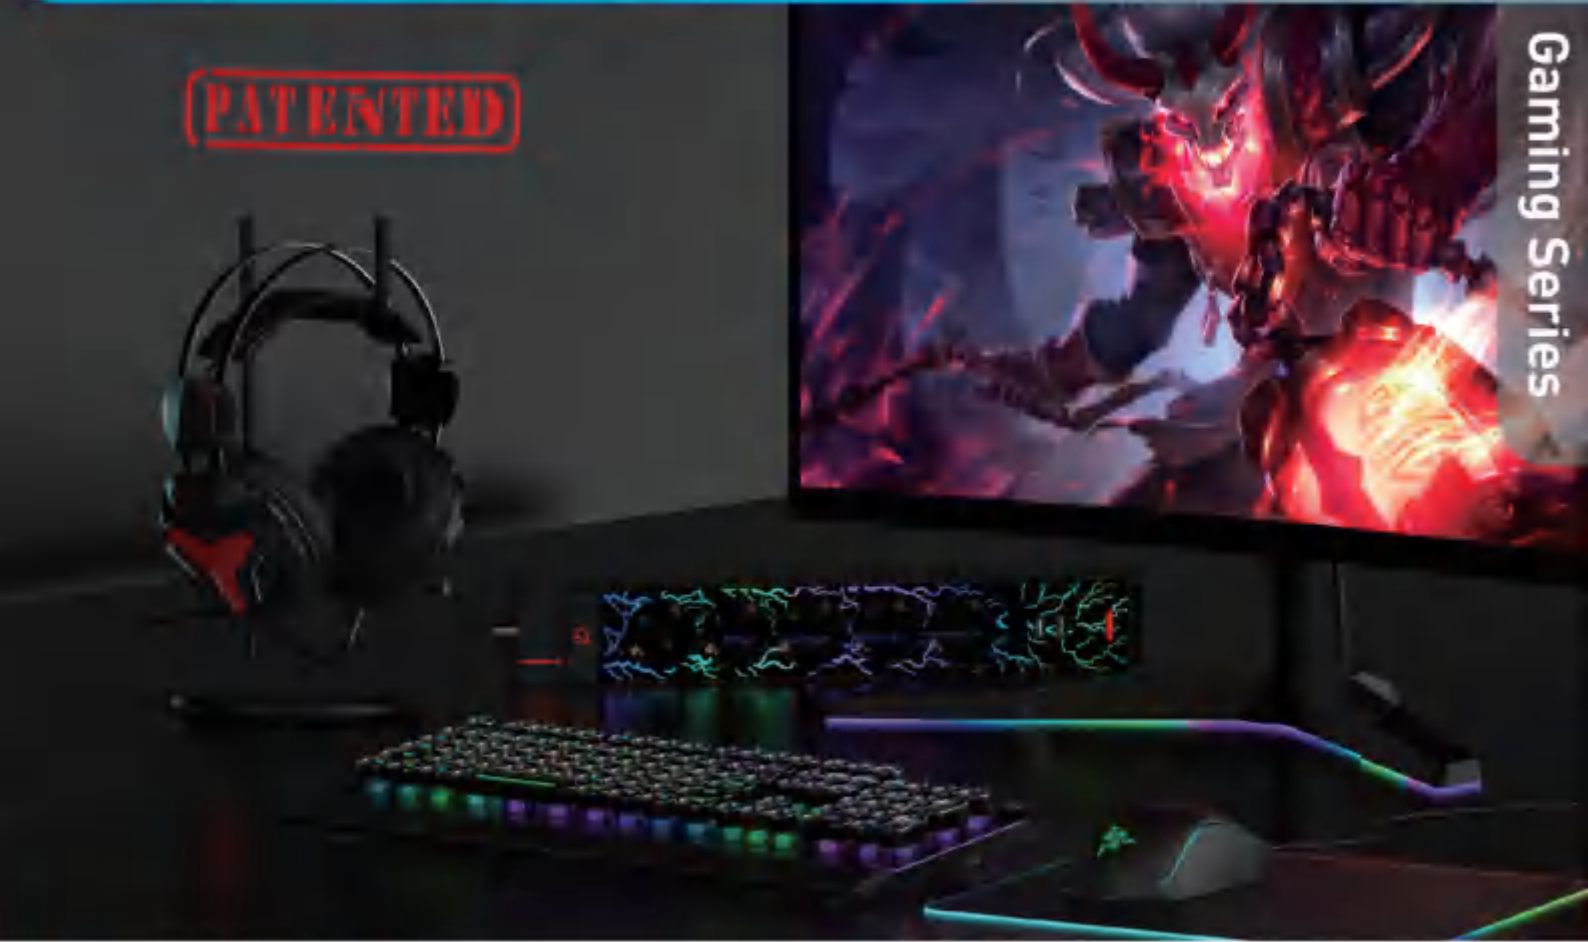

Gaming Multi-socket




NEW

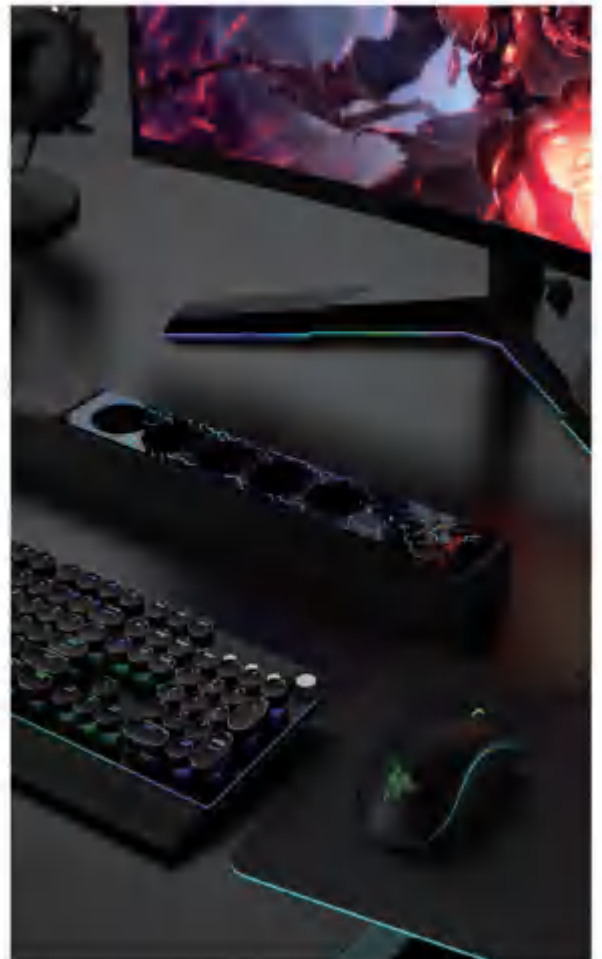

Model 613115U2

Power: Max. 3680W 16A/250V-
Cable: H05VV-F 3G 1.5mm²
Socket with 5 outlets,
with shutter and switch,
with multiple-RGB lighting
USB charging: 5V DC 2.4A(Max)

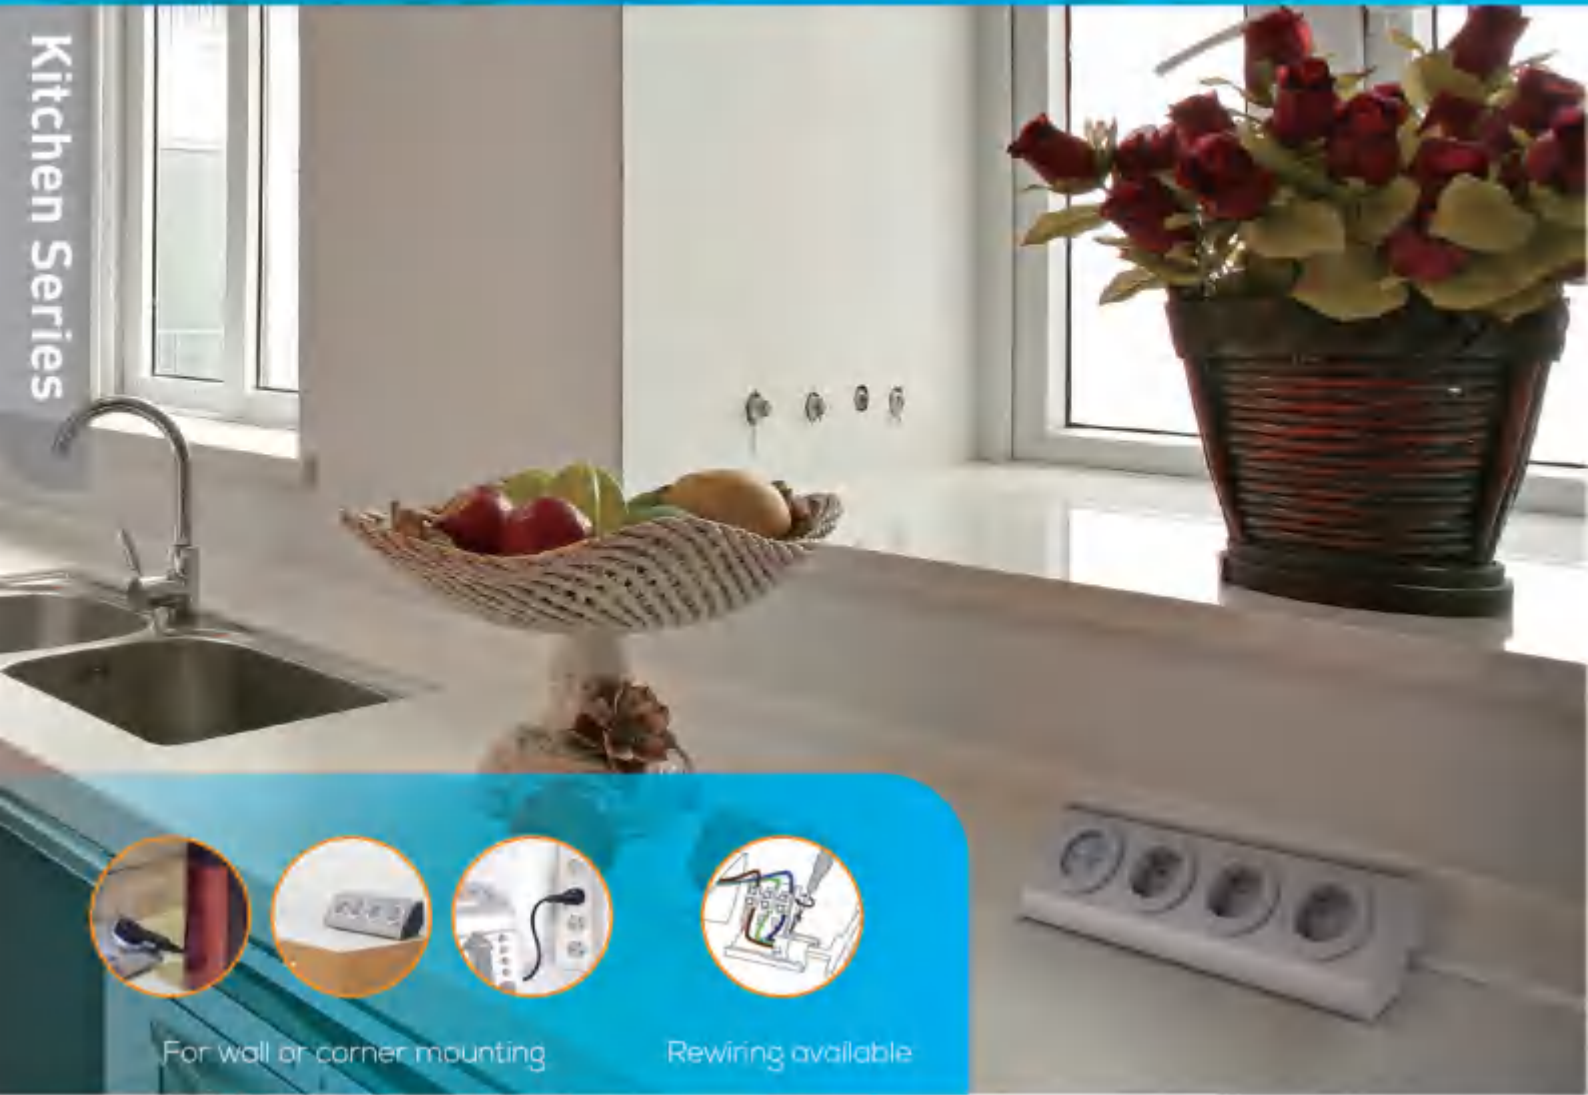

For wall or corner mounting

Rewiring available

Schuko Socket



Socket with shutter, with flat plug
 Power: Max. 3680W 16A/250V~
 Cable: H05VV-F 3G1.5mm²


Model	USB Specification	Outlets quantity
K6014	x	4
K6013U	A+A: 5.0V 2.4A Max	3

Schuko Socket (Rewirable)



Socket with shutter
 Power: Max. 3680W 16A/250V~

Model	USB Specification	Outlets quantity
K6014C	x	4
K6013UC	A+A: 5.0V 2.4A Max	3



Max 1350W/230V~



Max 3000W/230V~



Thermal Protector



Double circuit control switch



USB 5V 2.4A/3.4A

Power: 16A 250V

Cable: H05VV-F 3G 1.5mm² cable Max 7M

Cable Reel



Model	USB Specification	Outlets quantity	Switch	Shutter
609170	x	4	x	✓
609170U	A+A: 5.0V 2.4A Max	3	x	✓
609170S	x	3	✓	✓

USB EXTENSION CORD

USB Extension Cord

PATENTED



USB Extension Cord

NEW   



Model	Description	USB Specification
403024-2U3C	DE, MAX.3680W 16A/250V- H05VV-F 3G 1.5mm ² cable	A+C: 5.0V 3.0A Max C: 5.0V 3.0A A: 5.0V 2.4A Max
403024-2U4C	DE, MAX.3680W 16A/250V- H05VV-F 3G 1.5mm ² cable	A+C: 5.0V 3.0A Max C: PD 18W A: QC 18W



3501
Schuko type
Power: Max,3680W 16A 250V~
Cable: H05VV-F 3G 1.0/1.5mm²



403021
Schuko type
with flat plug
Power: Max,3500W 16A 250V~
Cable: H05VV-F 3G 1.5mm²



3503
Dutch type
Power: Max,3680W 16A 250V~
Cable: H05VV-F 2x 1.0/1.5mm²



3504
Schuko type
Power: Max,625W
Cable: H05VVH2-F 2x0.75mm²



EXTENSION CORD

Extension Cord



EURO 2.5A EXTENSION CABLE WITH 90 DEGREE ANGLED PLUG

Product features



3504L

2.5A 250V~

Plug: 90° Angled Euro Type C plug

Socket Standard:

NEK 502 Sheet XVla;

SS 428 0834 Sheet X;

SFS 5610 Sheet XVIA

Cable Specification:

H05VVH2-F 2x0,75mm²





PATENTED



Clip



Magnet



Extension Cord



403022

Schuko type
without magnet
Max. 3500W 16A/250V
H05VV-F 3G1.5mm²



403022M

Schuko type
with magnet
Max. 3500W 16A/250V
H05VV-F 3G1.5mm²




403023


Schuko type
With 10A overload protection
16A/250V
Max: 10A/2300W
H05VV-F 3G1.0 Max 30M Cable

10A



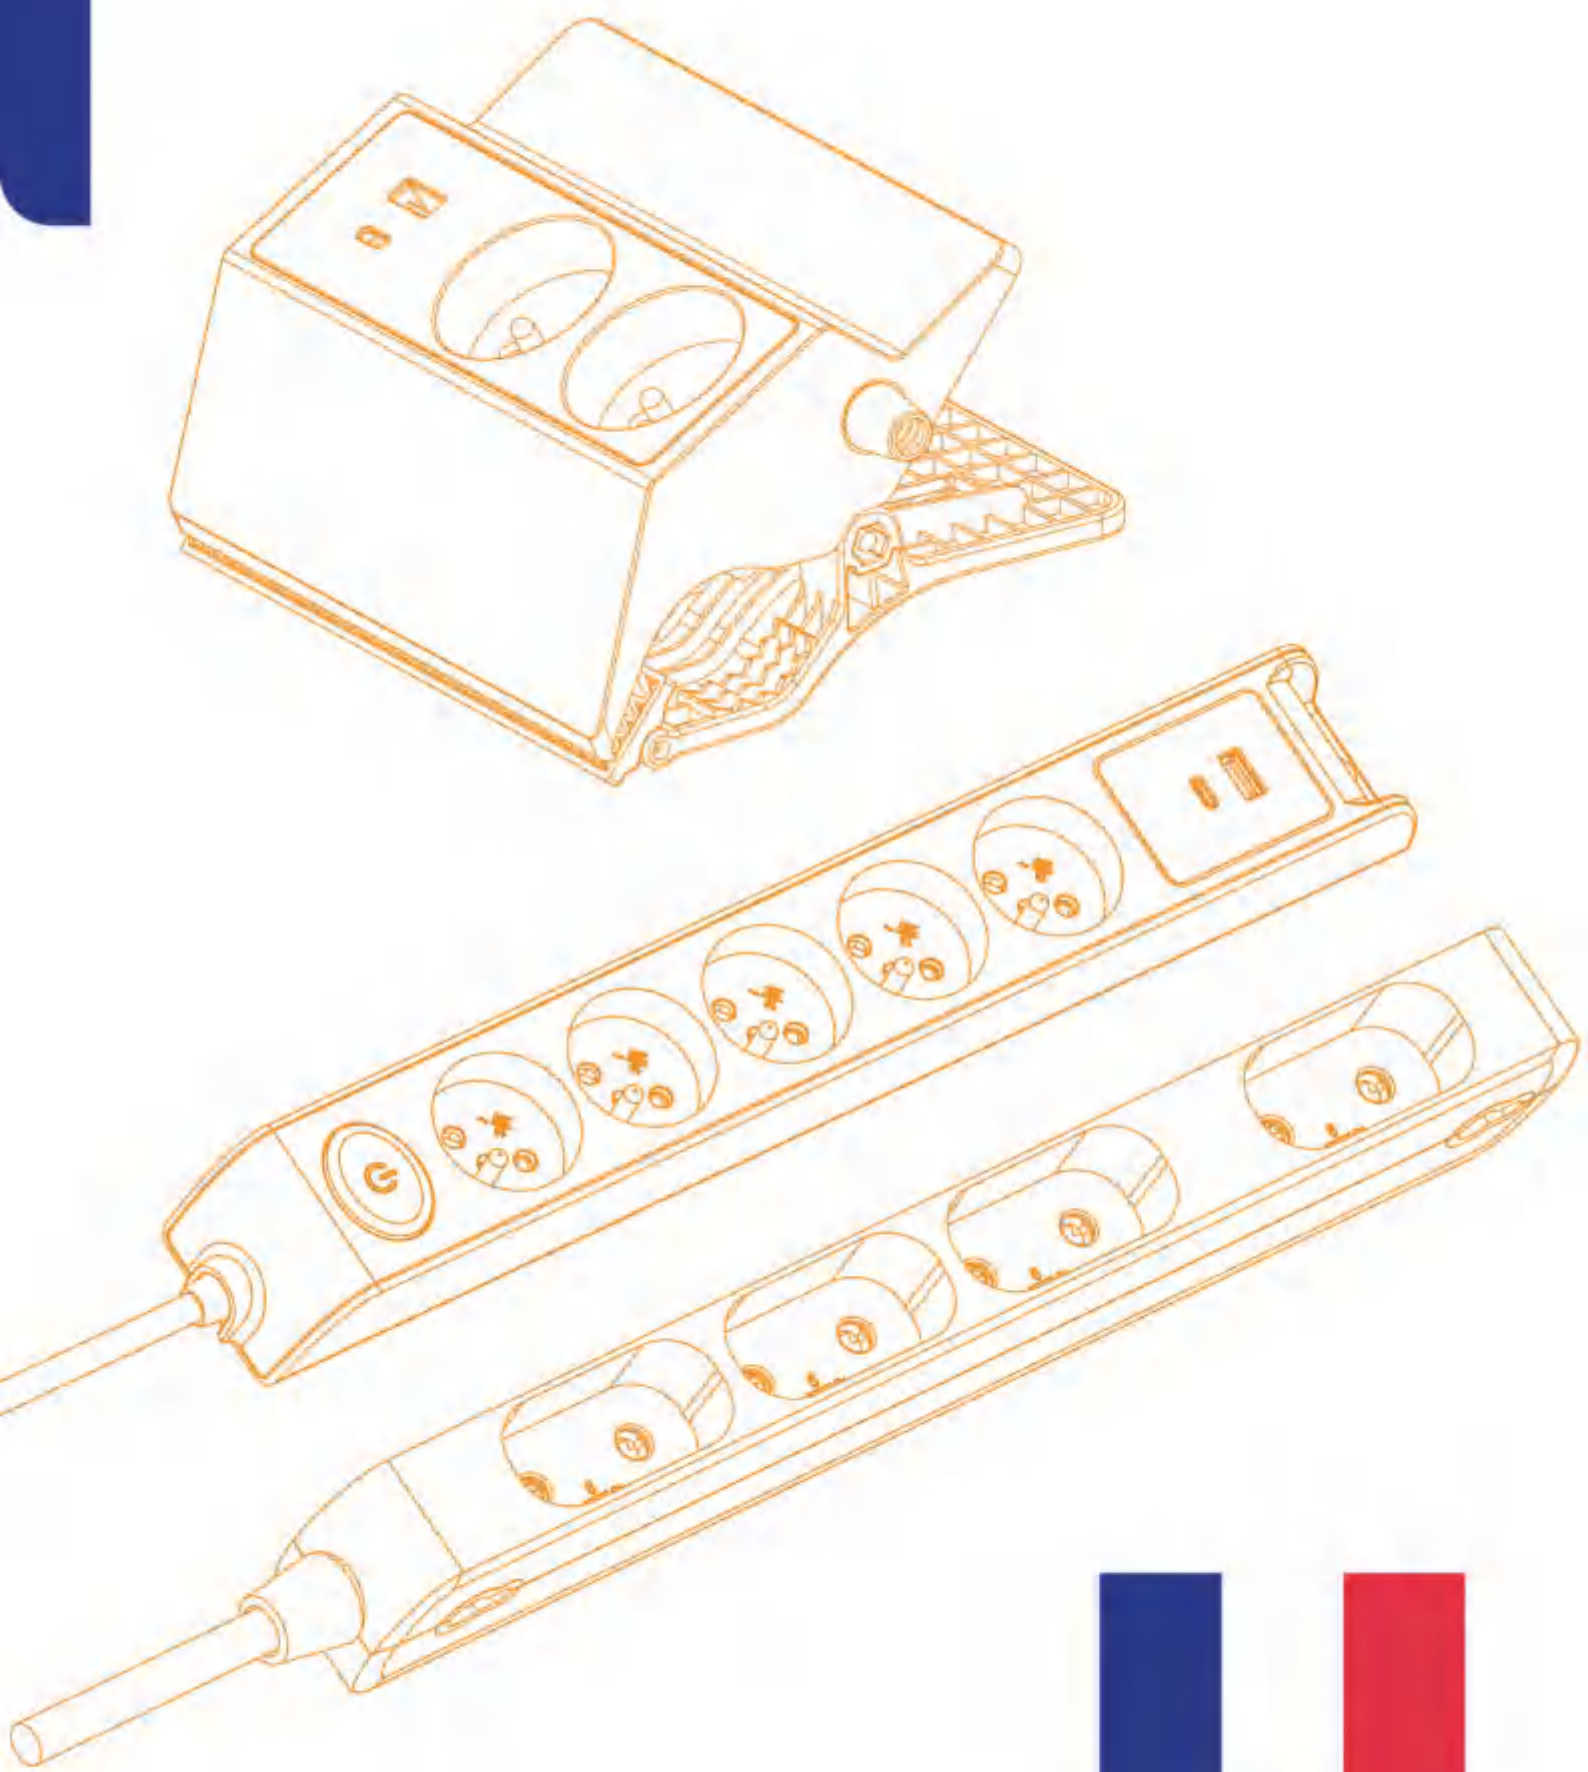


FRENCH TYPE



PD/QC 3.0 36W
40%
iPhone to about 60% in 30 mins



Traditional 5V/1A charge
20%
iPhone to about 20% in 30 mins



Power: Max. 3680W 16A/250V-
Cable: H05VV-F, 3G 1.5/1.0mm²

PD 36W

Power 36



NEW CE

French type with shutter, with button switch



721113-U9C






721115-U9C







Model	Outlets quantity
721113-U9C	3
721115-U9C	5

3-Ports Fast Charger 36W Max

Single-Cable Charging

-  PD-1 36W output up to
-  PD-2 36W output up to
-  USB-A 36W output up to

2-Cable Charging

-  PD-1  USB-A 15W Max output up to
-  PD-1  PD-2 15W Max output up to
-  PD-2  USB-A 15W Max output up to


3-Cable Charging

-  PD-1  PD-2  USB-A 15W Max output up to

OMNI-DESKTOP

Omni-DeskTop

PATENTED

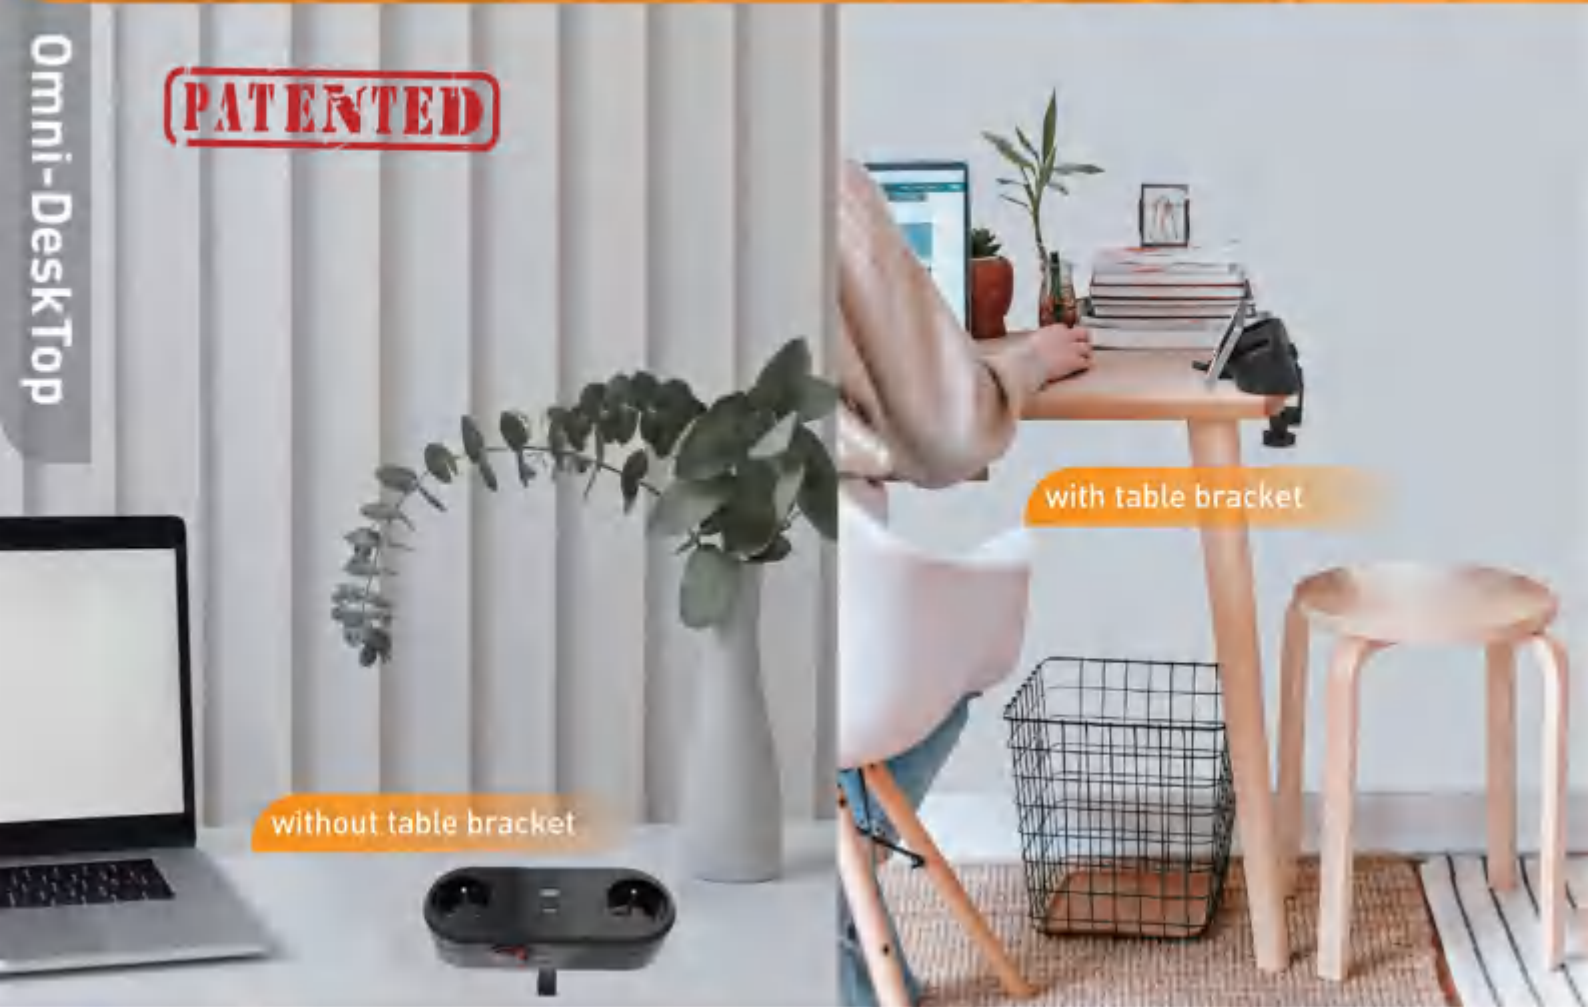

without table bracket

with table bracket

Omni-DeskTop




NEW CE

French type with shutter, with switch



Slide-out tray for supporting the phone/lpad

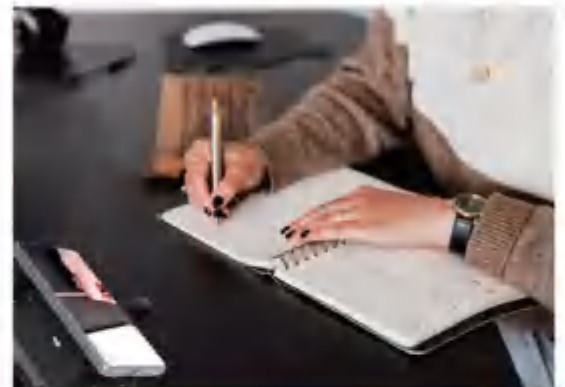

Easily Screw Clamp For Table Thicknesses 33mm Max

Model	USB Charging	Outlets quantity	Switch
D7202-U4C	A+C:5V 3.4A Max C: PD 20W MAX A: QC 18W MAX	2	✓
D7202-U3C	A+C:5V 3.4A Max C: 5V 3A A: 5V 2.4A	2	✓



PowerArt



NEW NF CE
100TAP

French type with shutter, with button switch, with/without USB



731114-U2



731113



731112



731114



731115





731116

Model	USB Charging	Outlets quantity
731114-U2	A+C: 5V 3.4A Max C: PD 18W MAX A: QC 18W MAX	4
731114-U3	A+A+A, 5V 2.4A Max	4
731113	X	3
731114	X	4
731115	X	5
731116	X	6



Power: Max. 3680W 16A/250V~
 Cable: H05VV-F 3G 1.0/1.5mm²
 Max. 2M for 3G 1.0mm²

Exclusive in Belgium/France



Spaced outlet



Charge the computer



Quick Charge, Type-C PD

Ara socket



NEW CE

French type with shutter, with button switch




761116SGP
 761118SGP




761004 [Rewirable]

Model	USB Charging	Outlets quantity	Switch	Surge Protection
761113-2U3C	A+C: 5.0V 3.4A Max C: 5.0V 3.0A Max A: 5.0V 2.4A Max	3	✓	×
761113-2U2	A+A: 5.0V 2.4A Max	3	✓	×
761113	×	3	✓	×
761114	×	4	✓	×
761116P	×	6	✓	×
761118P	×	8	✓	×
761013	×	3	×	×
761014	×	4	×	×
761016P	×	6	×	×
761116SGP	×	6	✓	Type 3 SPD Uoc: 2KV(L-N, L/N-PE) Up: 1.0KV(L/N-PE), 1.0KV(L-N)
761118SGP	×	8	✓	
761004	×	4	×	×





PD/QC 3.0 18W
iPhone to about 50% in 30 mins



Traditional 5V/1A charge
iPhone to about 20% in 30 mins


Dedicatedly Designed



Lighted Switch



USB A+C: 5V 3A Max



Ventilation Hole



Quick Charge, Type-C PD



French type Socket



French Socket with shutter
Cable: H05VV-F 3G 1.0/1.5mm²



Model	USB Charging	Switch	Outlets quantity
711113-2U2	A: 5.0V 2.4A Max	✓	3
711113-2U3	A: 5.0V 3.4A Max	✓	3
711115-2U2	A: 5.0V 2.4A Max	✓	5
711115-2U3	A: 5.0V 3.4A Max	✓	5
711013	×	×	3
711014	×	×	4
711015	×	×	5
711016	×	×	6
711113	×	✓	3
711114	×	✓	4
711115	×	✓	5
711116	×	✓	6

French type Socket (Type C)



NEW CE

French Socket with shutter
Cable: H05VV-F 3G 1.0/1.5mm²



Model	USB Charging	Switch	Outlets quantity
711113-2U3C	A+C: 5.0V 3.0A Max C:5.0V 3.0A A: 5.0V 2.4A Max	✓	3
711113-2U4C	A+C: 5.0V 3.0A Max C:PD 18W Max A:QC 18W Max	✓	3
711115-2U3C	A+C: 5.0V 3.0A Max C:5.0V 3.0A A: 5.0V 2.4A Max	✓	5
711115-2U4C	A+C: 5.0V 3.0A Max C:PD 18W Max A:QC 18W Max	✓	5

French type Socket (Rewirable)



French Socket with shutter



Model	Outlets quantity
711003	3
711004	4
711006	6

French type Socket



CE

French Socket with shutter
Cable: H05VV-F 3G 1.0/1.5mm²



Model	USB Charging	Switch	Outlets quantity
7112014	×	×	4
7112013-2U2	A: 5.0V 2.4A Max	×	3
7112113	×	✓	3

PATENTED



Foot Switch



Cord tab designed to the wall



USB 5V 2.4A



Rewiring available



Flat Plug

Power:Max.3500W 16A/230V~

French Socket



French Socket with shutter

Cable: H05VV-F 3G 1.0/1.5mm²

Model	USB Charging	Switch	Outlets quantity
C741113UC-2	A+A: 5.0V 2.4A Max	✓	3
C741115UC-2	A+A: 5.0V 2.4A Max	✓	5

Model	Outlets quantity	Switch
C741013	3	×
C741014	4	×
C741015	5	×
C741016	6	×

Model	Outlets quantity	Switch
C741113	3	✓
C741114	4	✓
C741115	5	✓
C741116	6	✓

French Socket(Rewirable)



French Socket with shutter

Model	Outlets quantity	Switch
C741003	3	×
C741004	4	×
C741005	5	×
C741006	6	×

Model	Outlets quantity	Switch
C741103	3	✓
C741104	4	✓
C741105	5	✓
C741106	6	✓



Clip-on working places



PATENTED



Clip Socket




Socket with shutter
Power:Max.3680W 16A/250V~



Model	Outlets quantity	Cable	Switch	USB Specification
C7103	3	H05VV-F 3G 1.5mm ²	X	X
C7112	2	H05VV-F 3G 1.5mm ²	√	X
C7102-U4C	2	H05VV-F 3G 1.5mm ²	X	A+C: 5V 3.4A Max C: PD 20W A: QC 18W



For wall or corner mounting



Rewiring available

French Socket



Socket with shutter, with flat plug
Power:Max.3680W 16A/250V~
Cable: H05VV-F 3G1.0/1.5mm²

Model	USB Specification	Outlets quantity
K7014	x	4
K7013U	A+A: 5.0V 2.4A Max	3

French Socket (Rewirable)



Socket with shutter
Power:Max.3680W 16A/250V~

Model	USB Specification	Outlets quantity
K7014C	x	4
K7013UC	A+A: 5.0V 2.4A Max	3



Small plain and tidy



Spaced outlet



Fix on the wall with screw



Save space



Energy-saving foot switch



Energy-saving Foot switch

- Robust hand/foot switch with integrated indicator light.
- With blue ring LED indicator
- 6A 250V- two-pole switch

French Euro Socket (Slim)



Socket with 4 outlets, with shutter



Model	Power	Foot switch
712014	6A/230V- Max:1380W	✗
712014F	6A/230V- Max:1380W	✓




Thermal Protector



Double circuit control switch



USB 5V 2.4A/ 3.4A



Max 1350W/230V~



Max 3000W/230V~

Power: 16A 250V
Cable: H05VV-F 3G 1.5mm² cable Max 7M

Cable Reel



Model	USB Specification	Outlets quantity	Switch	Shutter
709170	x	4	x	✓
709170U	A+A: 5.0V 2.4A Max	3	x	✓
709170S	x	3	✓	✓

USB EXTENSION CORD

USB Extension Cord

PATENTED



USB Extension Cord

NEW  **CE**



Model	Description	USB Specification
413024-2U3C	FR, MAX.3680W 16A/250V- H05VV-F 3G 1.0/1.5mm ² cable	A+C: 5.0V 3.0A Max C: 5.0V 3.0A A: 5.0V 2.4A Max
413024-2U4C	FR, MAX.3680W 16A/250V- H05VV-F 3G 1.0/1.5mm ² cable	A+C: 5.0V 3.0A Max C: PD 18W A: QC 18W



Extension Cord



3502

French type

Power: Max,3680W 16A 250V-
Cable: H05VV-F 3G 1.0/1.5mm²



413121

French type

Power: Max,3500W 16A 250V-
Cable: H05VV-F 3G 1.0/1.5mm²



USB EXTENSION CORD

Extension Cord

PATENTED



Clip



Magnet



Extension Cord



413022
 French type
 without magnet
 Max. 3500W 16A 250V-
 H05VV-F 3G 1.0/1.5mm²



413023 **10A**
 French type
 With 10A overload protection
 Max: 2300W 10A 250V-
 H05VV-F 3G 1.0 Max 30M Cable





UK Power 

NEW CB

UK type with Switch and USB
Cable:H05VV-F 3G1.25mm²
PP material



Model	USB Charging	Outlets quantity
301113-U4C	A+C: 5V3.4A Max C: PD 20W MAX A: QC 18W MAX	3
301115-U4C	A+C: 5V3.4A Max C: PD 20W MAX A: QC 18W MAX	5
301113	x	3
301115	x	5

USB ADAPTOR

USB Adaptor

PATENTED



USB Adaptor



NEW   





Model	Description	USB Specification
643001-2U3C	DE, 16A 250V~	A+C: 5.0V 3.0A Max C: 5.0V 3.0A A: 5.0V 2.4A Max
643001-2U4C	DE, 16A 250V~	A+C: 5.0V 3.0A Max C: PD 18W A: QC 18W
743001-2U3C	FR, 16A 250V~	A+C: 5.0V 3.0A Max C: 5.0V 3.0A A: 5.0V 2.4A Max
743001-2U4C	FR, 16A 250V~	A+C: 5.0V 3.0A Max C: PD 18W A: QC 18W



USB Adaptor



NEW

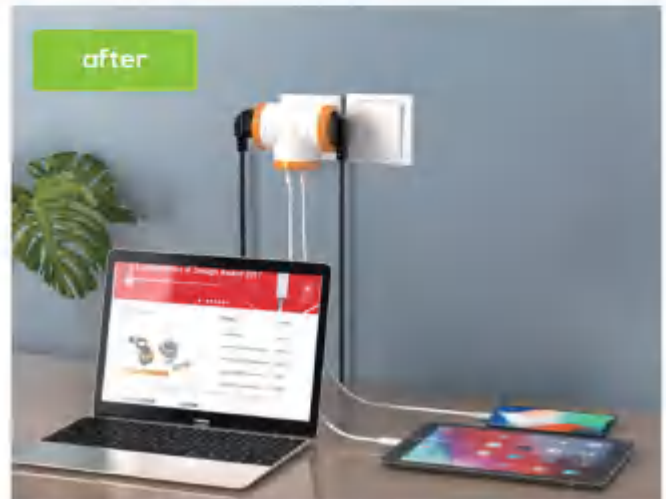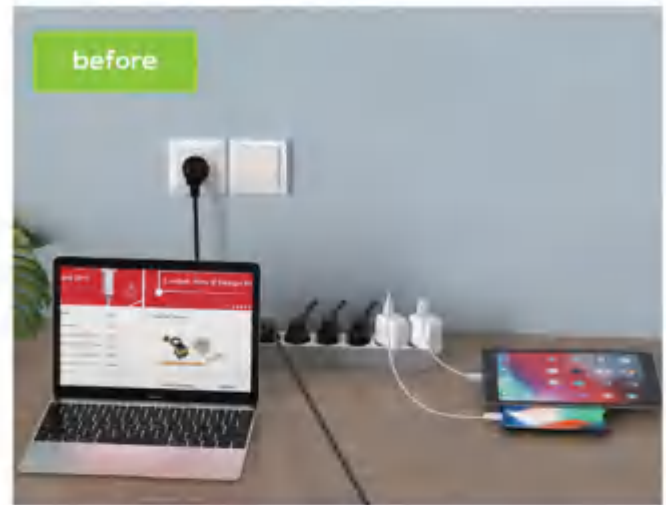

Model	Description	USB Specification
633132-U3C	DE, 16A 250V~	A+C:5V 3.4A Max C: 5V 3A; A: 5V 2.4A
633132-U4C	DE, 16A 250V~	A+C:5V 3.4A C: PD 20W A: QC 18W
733132-U3C	FR, 16A 250V~	A+C:5V 3.4A Max C: 5V 3A; A: 5V2.4A
733132-U4C	FR, 16A 250V~	A+C:5V 3.4A C: PD 20W A: QC 18W

TRIO FLAT ADAPTOR

NEW **(PATENTED)**

Trio Flat Adaptor



Approx.: 2.0cm



Better Products In Narrow Spaces



623117P

10A 250V~

Max.2500W


Three way adaptor with shutter
AENOR TEST REPORT



623118P



2.5A 250V~

Three way adaptor with shutter

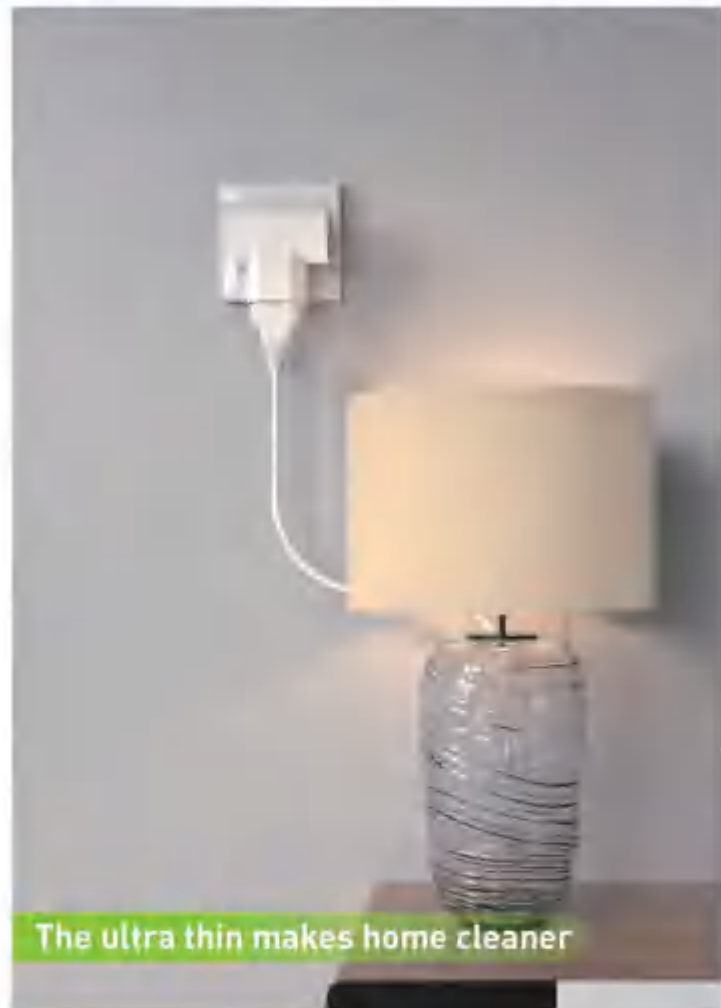

The ultra thin makes home cleaner

PATENTED



Outlet space saving

Patent No.:CN/DE
ZL 2015 3 0189515.6
2015103677

Adaptor



C623002
16A 250V~
Two way adaptor
with shutter



C623022
2.5A 250V~
Two way
adaptor
with shutter



C623023
1x16A+2x2.5A 250V~
Three way adaptor
with shutter





C633023
1x16A+2x10A 250V
Three way adaptor
with shutter



C623033
2.5A 250V~
Three way adaptor
with shutter



C633033
10A 250V~
Three way adaptor
with shutter



C623044
2.5A 250V~
Four way adaptor
with shutter



C633133
Max 3680W
16A/250V~,
three way
adaptor
with shutter



603133P
Max 3500W
16A/250V~,
2P+E
three way adaptor
with shutter



603140P
Max 3500W
16A/250V~,
2P+E
Two way adaptor
with shutter



C613002
Max 3680W
16A/250V~,
Two way adaptor
with shutter



C613003
Max 3680W
16A/250V~,
three way adaptor
with shutter



C713002
FRENCH ADAPTOR
Max 3500W
16A/250V~,
Two way adaptor
with shutter



C713003
FRENCH ADAPTOR
Max 3500W
16A/250V~,
three way adaptor
with shutter



603109N
16A 250V~
European-England
adaptor
with shutter




603110P
Max.3500W 16A 250~
2P+E
European-England adaptor
Socket:Schuko type, with shutter
Plug:British type,BS1363-13Amp fuse plug




65W


GaN

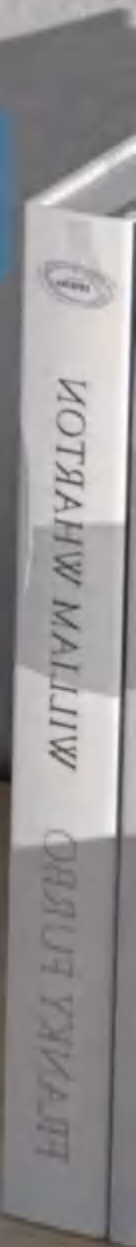

AC+DC Power Solutions (PD 20W)

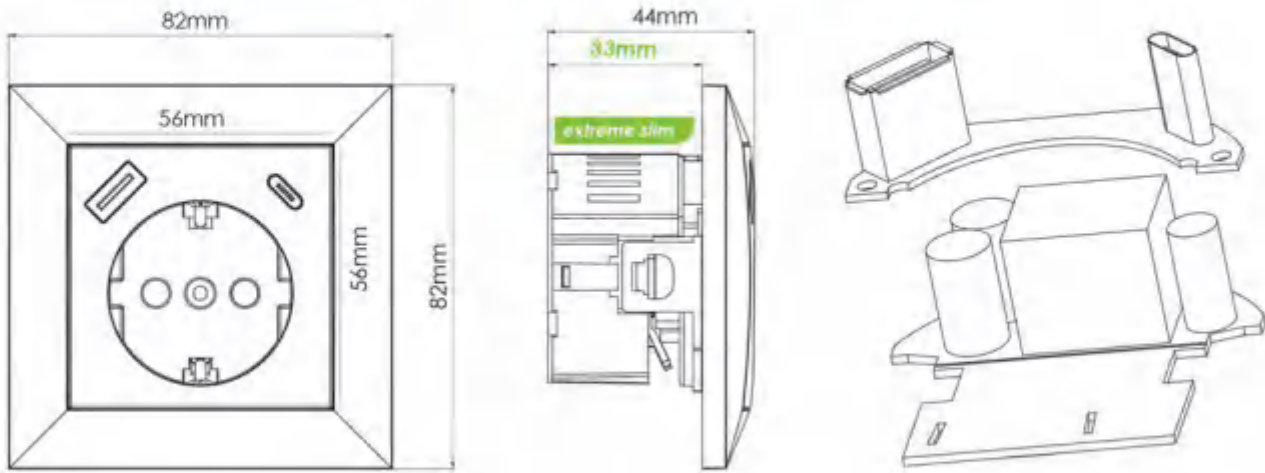

Comprehensive in-house capabilities in sophisticated mechanical designs and PCBAs for USB charging products.
 Customizable for different type of inwall socket from different market

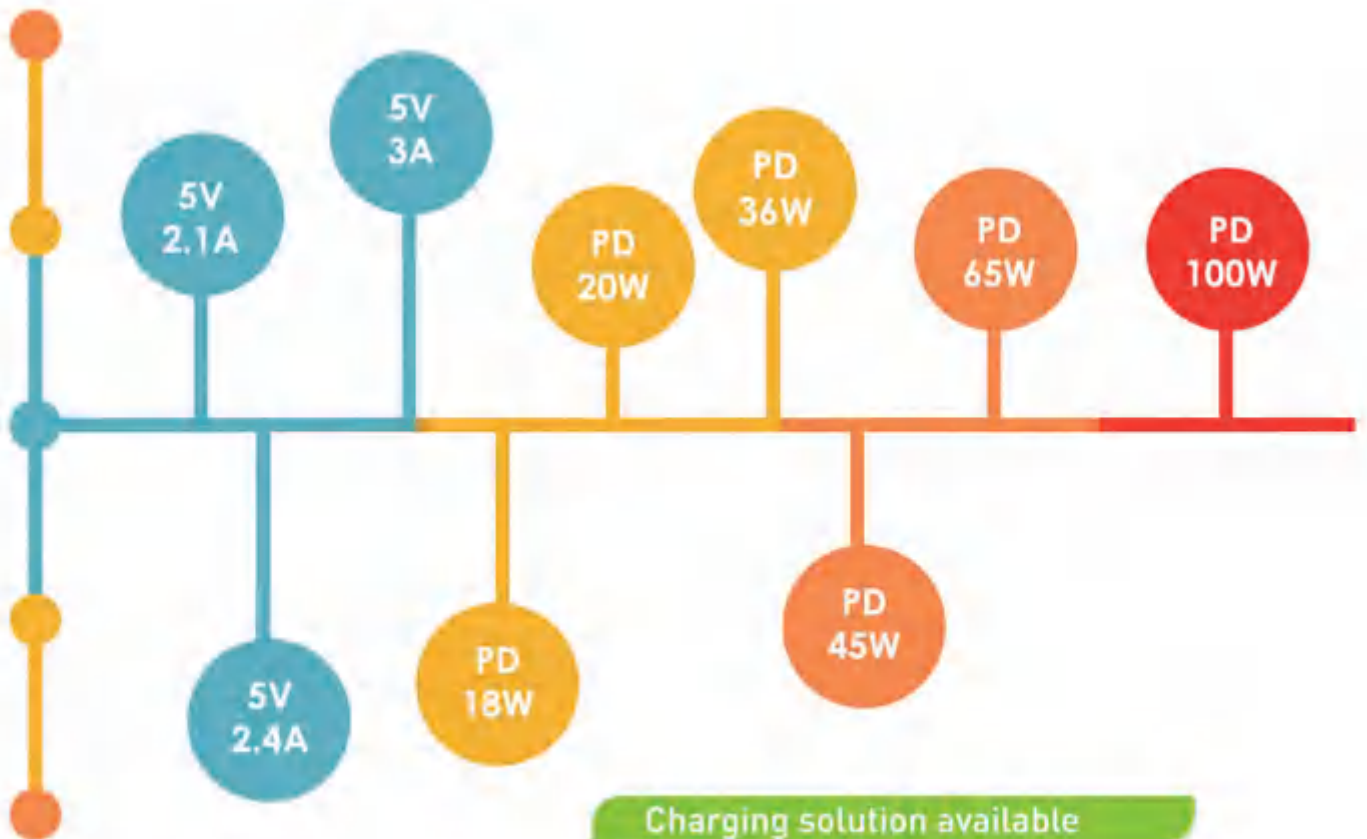

Inwall USB



NEW CE



LM60044-U6C

Type A: 5V/9V/12V@3A,20V3.25A

Type C: 5V/9V/12V/15V@3A,20V3.25A

Type A+C: type A 5V2.4A + type C 5V/9V/12/15V@3A,20V2.25A

GaN
65W



DE: LM60F021UC
FR: LM60F022UC
USB A : 5.0V 2.1A



DE: LM60F021U4C
FR: LM60F022U4C
USB A : QC 18W
USB C : PD20W
USB A+C: 5V 3A MAX



DE: LM60F021U2C
FR: LM60F022U2C
USB A : 5V 2.4A
USB A+A: 5V 2.4A MAX



LB60027-2U4C
USB A : QC18W
USB C : PD 18W
USB A+C : 5V 3A 15W



LB60027-2U2
USB A : 5.0V 2.4A
USB A+A : 5.0V 2.4A MAX



LM60044-U4C LM60044-U9C
USB A : QC 18W USB A : QC 18W
USB C : PD20W USB C : PD33W
USB A+C: 5V 3A MAX USB A+C : 5V 3.4A MAX



LM60044
USB A : 5V 2.4A
USB A+A: 5V 2.4A MAX





LK40044-U3C
USB A : 5V 2.4A
USB C : 5V 3A
USB A+C: 5V 3A MAX



LK40044
USB A : 5V 2.1A
USB A+A: 5V 2.1A MAX

LED DIMMER


Led Dimmer

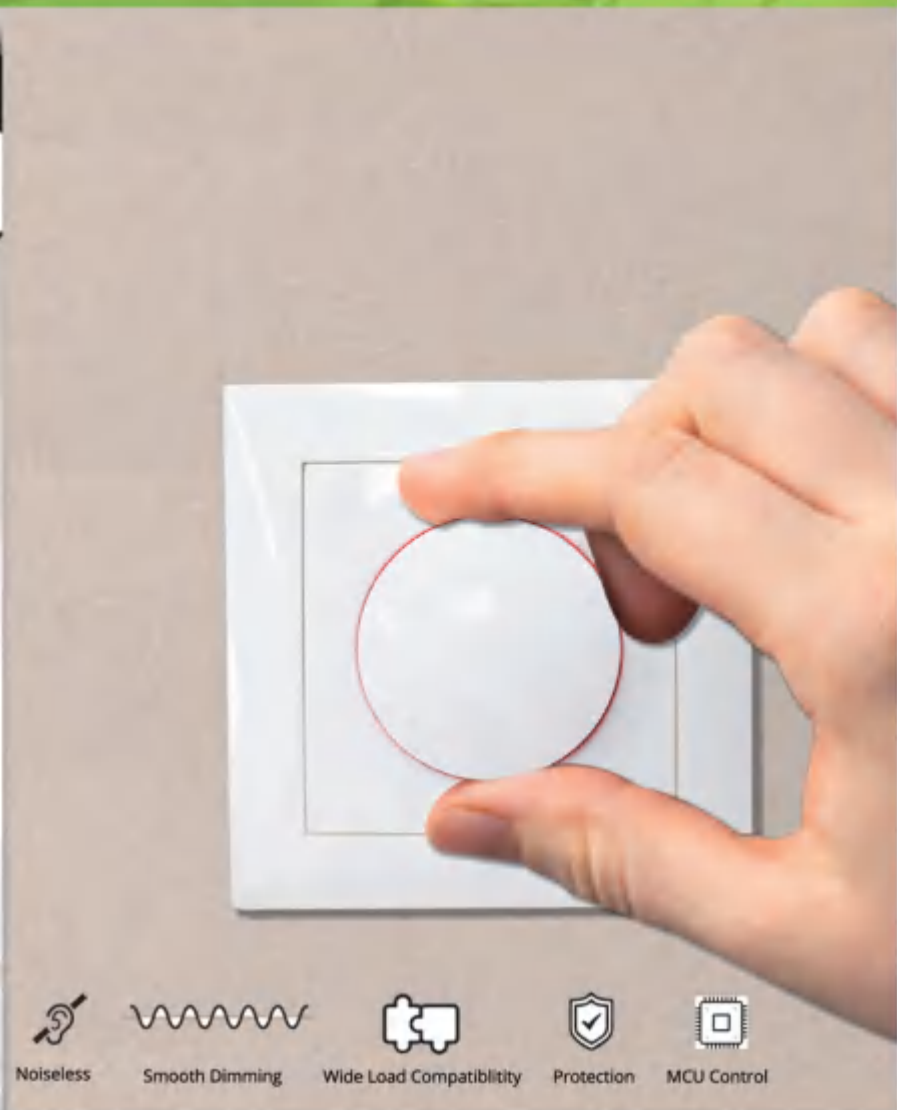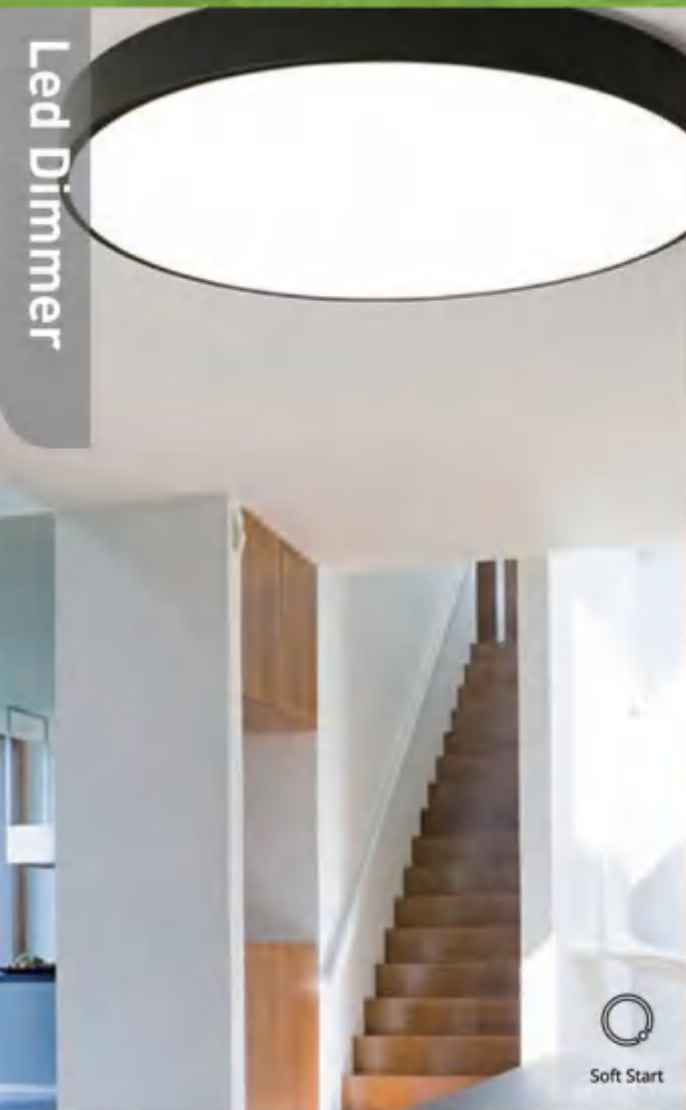

Soft Start



Noiseless



Smooth Dimming



Wide Load Compatibility



Protection



MCU Control

led Dimmer




LB60038EU
LED Dimmer
220-240V 50Hz
Dimmable LED lamps: 5-150w
Incandescent 100VA
Halogen 100VA
Trailing Edge



LK40039A
Universal LED Dimmer,
230V 50-60Hz,
traditional lamp 10-100W,
LED 5-100W, with over-temperature,
over-load and short-circuit protection

NEW

PATENTED



USB Charging, Max PD20W

Combo Plug

NEW



Integrated function of plug for power sockets and USB charging.





613003U4C
A+C:5V 3.4A
C: PD 20W
A: QC 18W



613013U4C
A+C:5V 3.4A
C: PD 20W
A: QC 18W



Plug for the power sockets

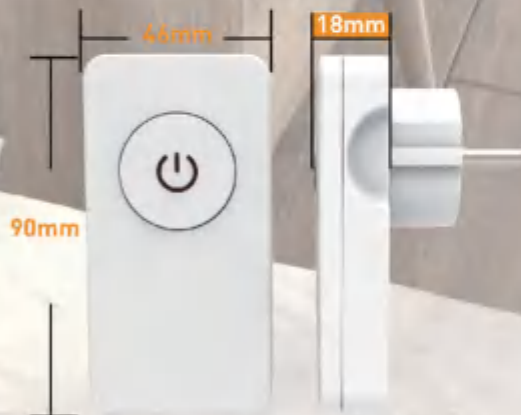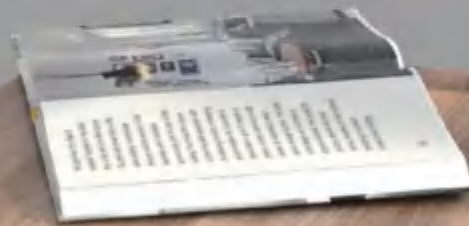



NEW

C24075
16A 250V~
2P+E
Flat plug with switch
PP material
90*46*18mm





PATENTED

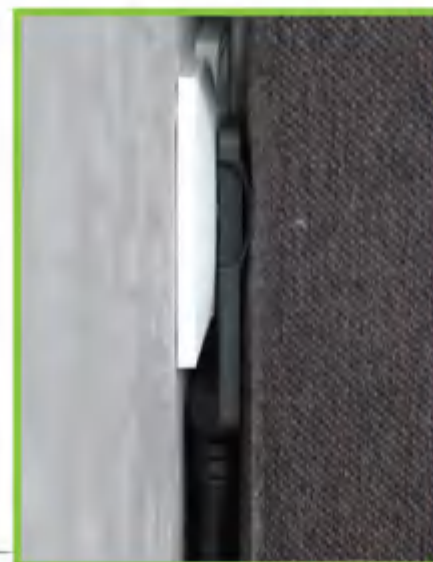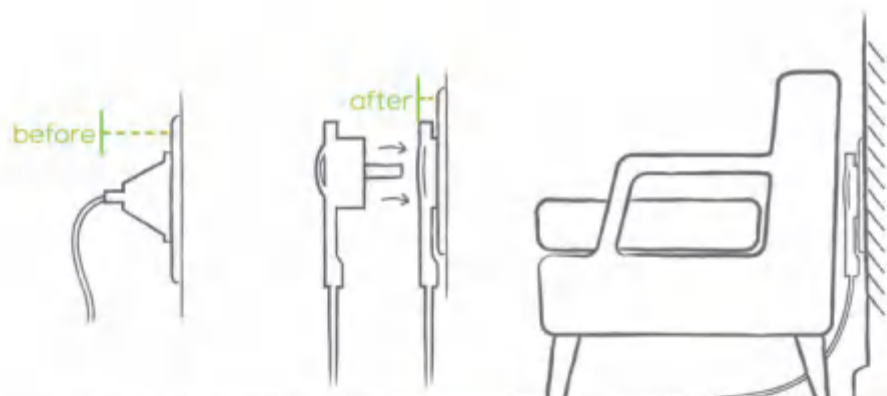

Plug & Socket



C2407
16A 250V~
2P+E
Flat plug
PP material



2201
16A 250V~
2P+E
Schuko type plug
PC material






2202
16A 250V~
2P+E
Schuko type socket
PC material




2202P
16A 250V~
2P+E
Schuko type socket
with shutter
PC material



2207
16A 250V~
2P+E
Schuko type plug
PC material




2209
16A 250V~
2P+E
Schuko type plug
RUBBER material




2210
16A 250V~
2P+E
Schuko type socket
RUBBER material



2210P
16A 250V~
2P+E
Schuko type socket
with shutter
RUBBER material



2237
16A 250V~
2P+E
Schuko type plug
RUBBER material



2203
16A 250V~
2P+E
Schuko type plug
PC material



2205
16A 250V~
2P+E
Schuko type plug
PC material



2211
16A 250V~
2P+E
Schuko type plug
RUBBER material





2239
16A 250V~
2P+E
Schuko type plug
RUBBER material



602103
10A 250V~
2P
Two pole plug
PC material
4.0mm pins with
insulating casing
AENOR TEST REPORT



602104P
10A 250V~
2P
Two pole plug socket
with shutter
PC material
4.0mm pins with
insulating casing
AENOR TEST REPORT



602201
16A 250V~
2P+E
Schuko type plug
PC material
AENOR TEST REPORT



602202P
16A 250V~
2P+E
Schuko type socket
with shutter
PC material
AENOR TEST REPORT



602105
10A 250V~
Two pole plug
PC material
4.0mm pins with
insulating casing



602106
10A 250V~
Two pole plug socket
PC material
4.0mm pins with
insulating casing



602203
16A 250V~
2P+E
Schuko type plug
PC material
with earthing contact



602204
16A 250V~
2P+E
Schuko type socket
PC material



702204
16A 250V~
2P+E
French type socket
PC material





Can be screwed to the wall



Two ways socket

Outdoor Series



602258
16A 250V~
2P+E
Two way Schuko socket
RUBBER material



602259
16A 250V~
2P+E
Two way French socket
RUBBER material





602228
16A 250V~
RUBBER material
with cover
Schuko Type socket
with shutter



602229
16A 250V~
RUBBER material
with cover
French Type socket
with shutter



602248
16A 250V~
2P+E
Schuko Type socket
RUBBER material



602249
16A 250V~
2P+E
French Type socket
Rubber material



602227
16A 250V~
Schuko type plug
RUBBER material



602247
16A 250V~
2P+E
Schuko type plug
RUBBER material



NEW

RP4402
16A 250V~
Schuko type plug
TPE material



Standard Plug

PVC materials



LM2501
16A/250V~
H05VV-F 3G 1.5mm²
H05VV-F 3G 1.0mm²



LM2503
16A/250V~
H05VV-F 2x 1.0mm²
H05VV-F 2x 1.5mm²



LM2504
2.5A/250V~
H05VV-F 2x0.75mm²



Flat Plug

16A/250V
PVC materials



NEW


613003U4C
2P+E
H05VV-F 3G 1.5mm²
H05VV-F 3G 1.0mm²
A+C:5V 3.4A C:PD 20W A: QC 18W



LM2427
H05VV-F 3G 1.5mm²
H05VV-F 3G 1.0mm²



LM2437
H05VV-F 2x1.0mm²
H05VV-F 2x0.75mm²
H05VVH2-F 2x0.75mm²





LM2447
H05VV-F 3G 1.5mm²
H05VV-F 3G 1.0mm²



LM2457
H05VV-F 2x1.0mm²
H05VV-F 2x0.75mm²
H05VVH2-F 2x0.75mm²



LM2407
2P+E
H05VV-F 3G 1.5mm²
H05VV-F 3G 1.0mm²



NEW

LM2504L
2.5A/250V~
H03VVH2-F 2x0.75mm²
H05VVH2-F 2x0.75mm²
H05VVH2-F 2x1.0mm²



EV CHARGING



EVC316

Charging Mode	Mode 3
Voltage	480V phase 3
Charging power	11kW
Rated current	16A
Cable	5G 2.5mm ² +1x0.5mm ²
Plug	EN62196 Type 2 Plug

EVC332

Charging Mode	Mode 3
Voltage	480V phase 3
Charging power	22kW
Rated current	32A
Cable	5G 6.0mm ² +1x0.5mm ²
Plug	EN62196 Type 2 Plug

EVC116B

Charging Mode	Mode 2
Voltage	250V phase 1
Charging power	3.7kW
Rated current	16A
Cable	3G 2.5mm ² +1x0.5mm ²
Plug	Side A for Car EN62196 Type 2 Plug
	Side B VDE German Type 16A Plug



Intelligent Temperature Control

Smart temperature control strategy, effective protection for safety charging

Easy Installation

Multiple Authentication Models

RFID, NFC, APP, plug and charge

Multiple Protection

Multiple protection makes charging safer



Multiple Protection

Multiple protection makes charging safer

Black, White, Silver Three Colors for Option

Customized Design available for ODM

Smart Connection

Charge reservation, OTA, charging status check via App

Main Product		7.4kW
General	Dimensions(mm)	L330 x W210 x D80 max.
	Weight	≤3kg
	Material	PC
	Certifications	CE
	Charging Power	Up to 7.4kW
	Charging Current	6—32A (adjustable)
	Voltage	230V (1-phase, 50-60Hz)
	Charging Mode	Mode 3
	Charging Cable	5m
	Charging Type	Type 2

WATERPROOF SAFE BOX

Waterproof Safe Box



IP44 Waterproof Safe Box

NEW



PB4401

Color option: Orange/red/yellow/green

Size: 24.5*6.6*7.7cm

Material: PP



PB4402

Color option: Orange/red/yellow/green

Size: 20.5*6.8*7.1cm

Material: PP



PB4403

Color option: Orange/red/yellow/green

Size: 36.7*9*9.4cm

Material: PP

PATENTED



Maggie Box



Model. TCB150

Folded Cable Management Box: An unique solution to save approx. 70% logistic cost and shelf space.

Size:350x150x140mm

Q'ty for 20GP 10000 Pcs

Q'ty for 40HQ 25000 Pcs



Maggie Cable Organizer



φ9mm



φ8mm



φ5mm



φ6mm



φ5mm

CCS1001
 2 pcs for each items,
 total 10 pcs in one set
 (3M adhesive)
 Material:TPR
 Color:white / black/ grey



2.2cm



3.6cm



6.5cm



9.1cm



11.8cm

CCS1002
 2 pcs for each items,
 total 10 pcs in one set
 Material:TPR
 Color:white / black



CCS1003
 12 in 1 cable clips
 Material:ABS
 Color:white/ transparent



CCS1004
 20 in 1 cable clips
 Material:ABS
 Color:white/ transparent



VCT1001
 5 in 1 Maggie Cable ties
 Material:Nylon
 Color:white/ black,
 yellow/ red/ blue



VCT1002
 6 in 1 Maggie Cable ties
 Material:Nylon
 Color:white/ black,
 yellow/ red/ blue/green

Waterproof connector

CE RoHS



M684-mini

IP68 M20

Number of Poles:	2P/3P	2P/3P/4P/5P	2P/3P/4P/5P
Rated Power:	24A 450VAC	32A 450VAC	32A 450VAC
Working Temperature:	T05	T05	T05
Housing material:	PC-Nylon	PC-Nylon	PC-Nylon
Terminal material:	Copper alloy	Copper alloy	Copper alloy
Rated connecting capacity:	0.5 - 2.5mm ²	0.5 - 4.0mm ²	0.5 - 4.0mm ²
Available cable diameter (Rubber)	4-8mm	4-8mm	4-8mm
	8-11mm	8-12mm	8-12mm
		10-14mm	10-14mm
Product Size:	75.95mm*25.02mm	113.19mm*30mm	97.1mm*34.38mm



Waterproof junction box

CE RoHS



M686-2

IP68 waterproof junction box

Rated Power:	24A 450VAC	24A 450VAC	24A 450VAC
Working Temperature:	T05	T05	T05
Housing material:	PC	PC	PC
Terminal material:	Copper alloy	Copper alloy	Copper alloy
Rated connecting capacity:	0.5 - 2.5mm ²	0.5 - 2.5mm ²	0.5 - 2.5mm ²
Available cable diameter (Rubber)	4-8mm(2*M20)	4-8mm(3*M25)	4-8mm(3*M25)
	8-11mm(2*M20)	8-12mm(3*M25)	8-12mm(3*M25)
		10-14mm (3*M25)	10-14mm (3*M25)
Product Size:	125.23mm*44.99mm*38.68mm	126.65mm*102.82mm*25.3mm	130.14mm*70.5mm*26.3mm





Solar Photovoltaic Connection Accessories

Product Features



IP67 Waterproof design



Stable self-locking mechanism



Tinned copper plug


Installation Instructions



MC4 PV Connector



PV EN001



1. TUV certificate
2. Rated current: 30A
3. Rated voltage: 1500V DC
4. Contact material: tinned copper
5. Insulation material: PC
6. Waterproof grade: IP67
7. Flame retardance: UL94-V0
8. Temperature range: -40°C to +85°C
9. Drawing force after connect with 4mm²: ≥350N
10. Contact resistance: < 0.35mΩ

PV Connection Cable



PV Cable




- 4mm² cable 1m in red and 1m in black + 2 pairs PV-EN001 connectors
4mm² PV cable specification:
1. Certificate: TUV
 2. Conductor: Tinned copper wires, Class 5, according IEC 60228
 3. Insulation/Sheath: 125°C Low-smoke, halogen-free, flame retardant, electron beam cross-linked PO (XLPO)
 4. Conductor structure: 56/0.285
 5. Outer Dia. of cable: 5.6mm
 6. Conductor resistance: 5.09Ω/km
 7. Special process: Electron beam cross-linked
 8. Rated Voltage: 1500V DC
 9. Temperature range: -40°C to 90°C
 10. Max conductor temperature: 120°C

Multiple type PV Cable



PV-LMPC

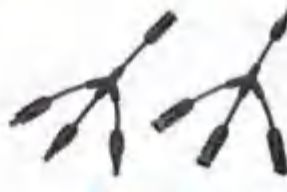

PV-LMPC



PV-LMPC

Rated current	Rated voltage	Contact material	Insulation material	Waterproof grade	Flame retardance	Temperature range	Contact resistance	Max. outer dia.	Shielding class	Connection system
30A	1000V DC	tinned copper	PC	IP67	UL94-V0	-40°C to +90°C	< 0.5mΩ	φ4mm	Class II	Snap-in

Multiple type PV connector



PV-LMPC



PV-LMPC



PV-LMPC



PV-LMPC



PV-LMPC

Rated current	Rated voltage	Contact material	Insulation material	Waterproof grade	Flame retardance	Temperature range	Contact resistance	Safety class
50A	1500V DC	tinned copper	PPQ	IP67	UL94-V0	-40°C to +85°C	< 0.5mΩ	Class II

SINGLE COLOR

MARBLE COLOR



50%

GRS CERTIFIED
RECYCLED PP



SHRINK BAG USE
PLA DEGRADABLE MATERIAL



BIODEGRADABLE
COMPOSTABLE
EN 13432:2000-12



WE CAN USE FSC CERTIFIED MATERIAL
FOR MASTER CARTON, SLEEVE,
PAPER CARD AND GIFT BOX



RECYCLABLE KRAFT CABLE TIE
&
SEALING TAPE



BE MINIMALIST AND ENVIRONMENT FRIENDLY



We are ready to serve:



Dialogues and communications for solutions tailored for your market.



Service of green product and range definition.



Service of green packaging design and displaying.



Quality delivery of the solutions.



LUMITEK INTERNATIONAL CO.,LTD

Add : No.18, Lane 239, Beihai Road, Jiangbei, Ningbo, China

Tel : +86-574-88165605 Fax : +86-574-88165666

E-mail : jacky@lumitek.cn www.lumitekgroup.com