


LED LIGHTING


LED 2022-2023



● LED FLOOD LIGHT




● LED SOLAR LIGHT



● LED WORK LIGHT



● LED BULKHEAD LIGHT

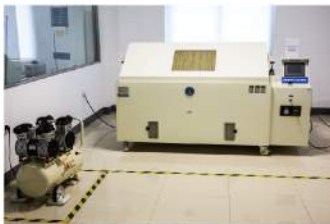

Lumitek, as the dedicated manufacturer of electrical and LED luminary products, has been evolving and innovating to stay tuned with the evolution of market and technologies since its inception in 1998.

An in-house laboratory, with all necessary testing equipment as LVD/EMC/ROHS, has been built to support our quality assurance. Automatic and semi-automatic production facilities are being introduced, combined with lean production management. Quality and cost-effective manufacturing is always our pursuit.

The technologies are changing and developing nowadays, which are highly concerned with our electrical and LED luminary industry. Our R&D team is characterized by professionalism, innovation and openness to new technologies as USB charging, smart control, energy efficiency and environment sustainability etc. Hundreds of patents, safety certificates, and industrial design awards are the proud outcomes. The integration of various resources and capabilities within and across the industry would also serve our customer needs with best possible solution.

The ever unchanged is our philosophy to create lasting value to our customers and help them to be competitive and differentiated from mass competition. Mutual sustainable developing, rather than simply buy and sell, is what we seek with our valued customers.

LED FLOOD LIGHT

 MACLUCE-PC	 VISION+	 TERMINUS
 MACLUCE-GLASS	 CRYSTAL 2.0	 APOLLO 10
 MACLUCE(TY)	 CRYSTAL 2.0 CCT	 APOLLO Q
 TYNEE	 GA	

LED SOLAR LIGHT

 GB SOLAR	 Butterfly Series
 SOLAR VISION+	 Binocular Series
 SOLARLUCE	 BD Series
 SLIM Series	 HANDBAG Series
	 OWL

LED WORK LIGHT


 CANNON
 CRYSTAL-Z
 PLUS-R-Z
 VISION-Z

LED BULKHEAD LIGHT

 LYNX PRO
 SERIES 5
 SERIES 6

LED Flood Light

CE   RoHS ErP

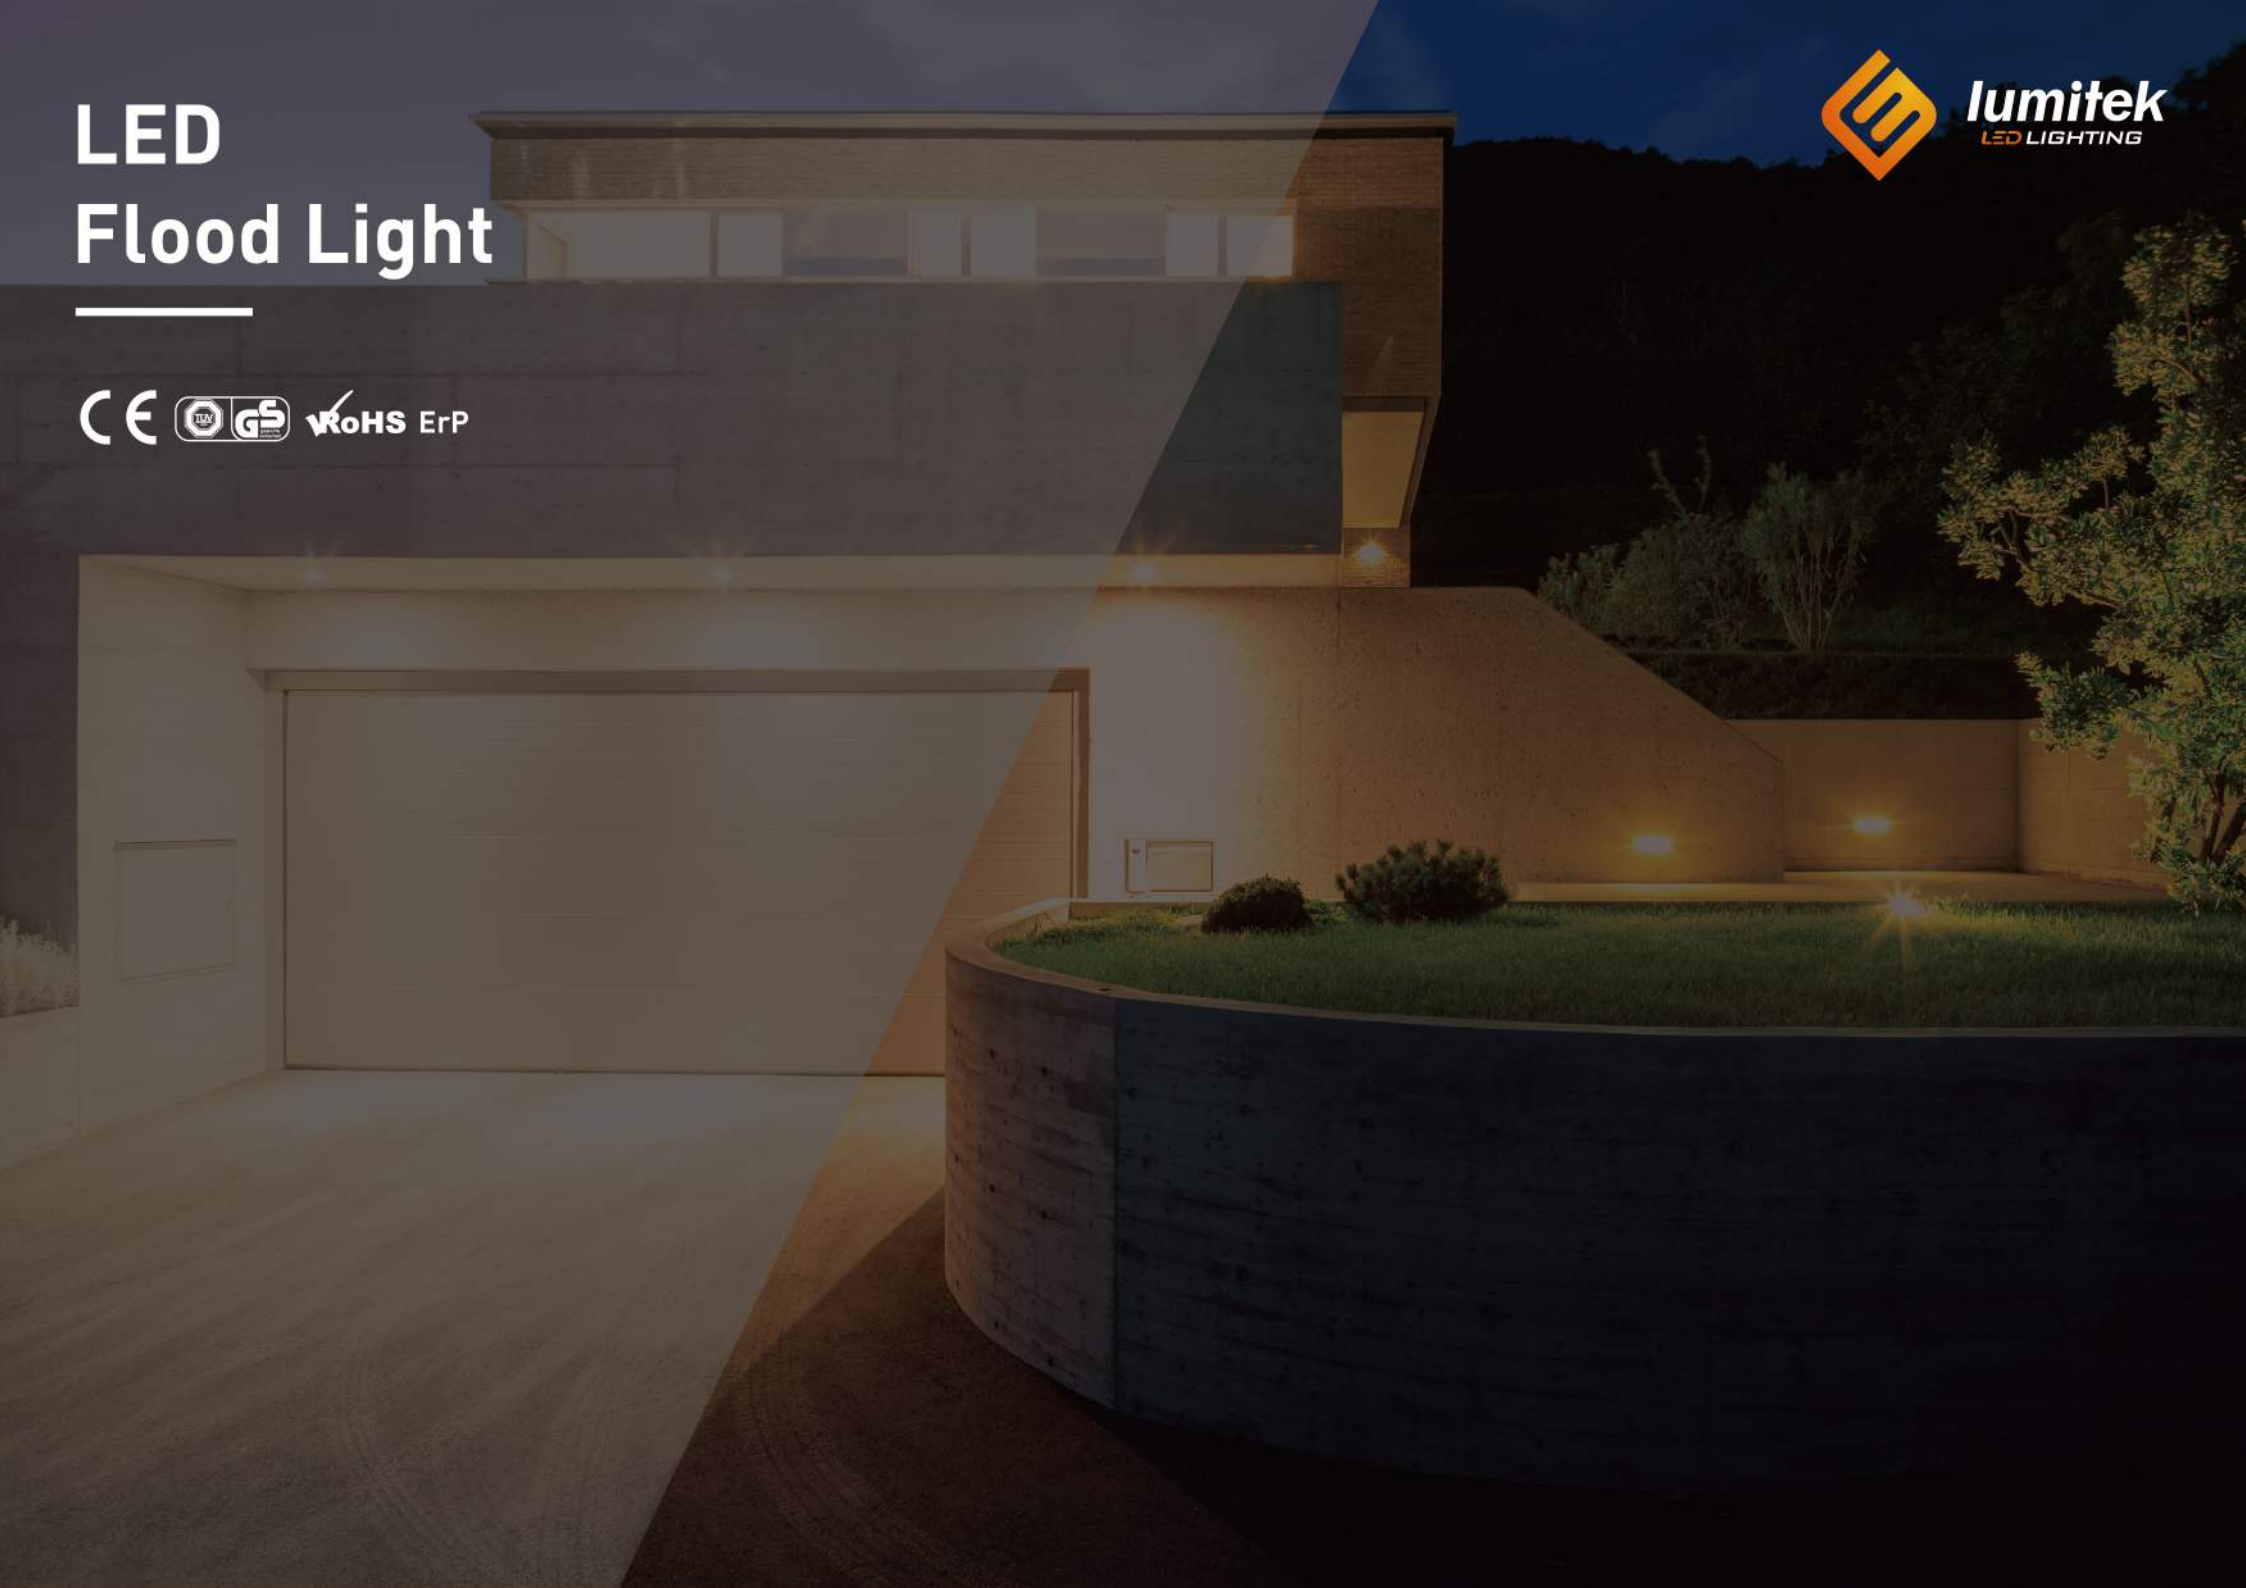




MACLUCE



Voltage Input: AC220-240V, 50/60Hz
 Detection Angle: 120°
 Detection Distance: 8±2M (<22°C)
 Delay Time: 10±3sec~10±2min (Adjustable)
 Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
 Working Temperature.: -10°C~+40°C
 Working Humidity.: ≤93%RH
 Maximum Load : 220V/AC
 Recommend height of installation: 1.8~2.5M

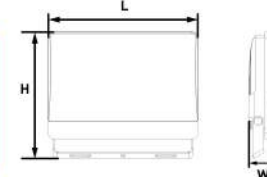

Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFP0H015	129*34.7*112mm	15W	≥ 0.7	1350lm	> 80	65	20	3.6/5.9	27*27*26
LFP0H030	170*35.2*148mm	30W	≥ 0.9	2700lm	> 80	65	20	6.4/9.4	37*22*30
LFP0H050	210*38*177mm	50W	≥ 0.9	4500lm	> 80	65	20	10/13.3	45*23.5*39
LFP0H100	280*45*230mm	100W	≥ 0.9	9000lm	> 80	65	10	10.5/13.34	53*30*26
LFP0H015S	120*39*145mm	15W	≥ 0.7	1350lm	> 80	54	20	4.4/6.92	27*24*32.5
LFP0H030S	170*39*183mm	30W	≥ 0.9	2700lm	> 80	54	20	7.2/10.52	37*24*40.5
LFP0H050S	210*40*214mm	50W	≥ 0.9	4500lm	> 80	54	20	10.8/14.56	45*24.5*46.5
LFP0H100S	280*46*267mm	100W	≥ 0.9	9000lm	> 80	54	10	11/14.07	53*30*29.5



E/F

Including light source of energy efficiency class



DIE-CASTING ALU + GLASS



120° LIGHT ANGLE



-25°C ~ +50°C



30000h

AC220~240V
50/60HZ

BLACK

GREY


WHITE



MACLUCE



Voltage Input: AC220-240V, 50/60Hz
 Detection Angle: 120°
 Detection Distance: 8±2M (<22°C)
 Delay Time: 10±3sec~10±2min (Adjustable)
 Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
 Working Temperature.: -10°C ~ +40°C
 Working Humidity.: ≤93%RH
 Maximum Load: 220V/AC
 Recommend height of installation: 1.8~2.5M



This product contains a light source of energy efficiency class <F>

Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFG0H015	129*26*112mm	15W	≥ 0.7	1500lm	> 80	65	20	4.4/6.82	27*27*26
LFG0H030	170*26*148mm	30W	≥ 0.9	3000lm	> 80	65	20	8.8/11.48	37*22*30
LFG0H050	210*28*177mm	50W	≥ 0.9	5000lm	> 80	65	20	10.4/16.52	45*23.5*39
LFG0H100	280*34*230mm	100W	≥ 0.9	10000lm	> 80	65	10	14/16.42	53*30*26
LFG0H015S	120*39*145mm	15W	≥ 0.7	1500lm	> 80	54	20	5.2/7.8	27*24*32.5
LFG0H030S	170*39*183mm	30W	≥ 0.9	3000lm	> 80	54	20	8/12.82	37*24*40.5
LFG0H050S	210*40*214mm	50W	≥ 0.9	5000lm	> 80	54	20	11.6/17.76	45*24.5*46.5
LFG0H100S	280*46*267mm	100W	≥ 0.9	10000lm	> 80	54	10	11.5/12.71	53*30*29.5



DIE-CASTING ALU + GLASS
DIE-CASTING ALU + PC



120° LIGHT ANGLE



-25℃ ~ +50℃



30000h



AC220~240V
50/60HZ



BLACK GREY WHITE



Light changes to the rhythm of the music




Bimodule



Model	Product Size (L*W*H)	Power	DF	Funcion	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFP0H024-TY	170*35.2*148mm	24W	≥ 0.7	RGBCW	65	20	8/11	37*22*30
LFP0H050-TY	210*38*177mm	50W	≥ 0.9	RGBCW	65	20	11.6/14.9	45*23.5*39
LFP0H100-TY	280*45*230mm	100W	≥ 0.9	RGBCW	65	10	11.3/14.14	53*30*26
LFG0H024-TY	170*26*148mm	24W	≥ 0.7	RGBCW	65	20	10.4/13.08	37*22*30
LFG0H050-TY	210*28*177mm	50W	≥ 0.9	RGBCW	65	20	12/18.12	45*23.5*39
LFG0H100-TY	280*34*230mm	100W	≥ 0.9	RGBCW	65	10	14.8/17.22	53*30*26



Voltage Input: AC220-240V, 50/60Hz
 Detection Angle: 120°
 Detection Distance: 8±2M (<22°C)
 Delay Time: 10±3sec~10±2min (Adjustable)
 Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
 Working Temperature: -10°C~+40°C
 Working Humidity: ≤93%RH
 Maximum Load: 220V/AC
 Recommend height of installation: 1.8~2.5M




Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFP0F010	105*70*102mm	10W	≥ 0.5	800lm	> 80	65	20	3.2/4.6	43*24*24
LFP0F020	135*70*102mm	20W	≥ 0.7	1600lm	> 80	65	20	4.3/5.8	43*24*30
LFP0F030	165*70*114mm	30W	≥ 0.9	2400lm	> 80	65	20	7/8.6	43*27*36
LFP0F050	210*70*142mm	50W	≥ 0.9	4000lm	> 80	65	20	10.4/12.6	45*32*43
LFP0F010S	105*143*64mm	10W	≥ 0.5	800lm	> 80	54	20	4.6/6.1	43*24*33
LFP0F020S	135*165*64mm	20W	≥ 0.7	1600lm	> 80	54	20	5.7/7.6	43*30*37
LFP0F030S	165*185*64mm	30W	≥ 0.9	2400lm	> 80	54	20	8.3/10.7	43*36*41
LFP0F050S	210*217*66.4mm	50W	≥ 0.9	4000lm	> 80	54	20	12/15	45*43*48



Voltage Input: AC220-240V, 50/60Hz
 Detection Angle: 120°
 Detection Distance: 8±2M (<22°C)
 Delay Time: 10±3sec~10±2min (Adjustable)
 Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
 Working Temperature: -10°C ~ +40°C
 Working Humidity: ≤93%RH
 Maximum Load: 220V/AC
 Recommend height of installation: 1.8~2.5M



Up & Down Light Full Light Left & Right Light



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFP0K010	105*72*102mm	10W	≥ 0.5	800lm	> 80	65	20	3.2/4.6	43*24*24
LFP0K020	135*72*102mm	20W	≥ 0.7	1600lm	> 80	65	20	4.3/5.8	43*24*30
LFP0K030	165*72.5*114mm	30W	≥ 0.9	2400lm	> 80	65	20	7/8.6	43*27*36
LFP0K050	210*73.5*142mm	50W	≥ 0.9	4000lm	> 80	65	20	10.4/12.6	45*32*43
LKP0K010S	105*143*64mm	10W	≥ 0.5	800lm	> 80	54	20	4.6/6.1	43*24*33
LKP0K020S	135*165*64mm	20W	≥ 0.7	1600lm	> 80	54	20	5.7/7.6	43*30*37
LKP0K030S	165*185*64mm	30W	≥ 0.9	2400lm	> 80	54	20	8.3/10.7	43*36*41
LKP0K050S	210*217*66.4mm	50W	≥ 0.9	4000lm	> 80	54	20	12/15	45*43*48



Including light source of energy efficiency class



DIE-CASTING ALU + PC



120° LIGHT ANGLE



-25 °C ~ +50 °C



30000h



AC220~240V
50/60HZ



BLACK


GREY



CRYSTAL 2.0



Voltage Input: AC220-240V, 50/60Hz
Detection Angle: 120°
Detection Distance: 8±2M (<22 °C)
Delay Time: 10±3sec~10±2min (Adjustable)
Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
Working Temperature.: -10 °C ~ +40 °C
Working Humidity.: ≤93%RH
Maximum Load : 220V/AC
Recommend height of installation: 1.8~2.5M



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LF00E010	114*51*91mm	10W	≥ 0.5	800lm	> 80	65	20	5.8/6.2	38*27*22
LF00E020	147*55*107mm	20W	≥ 0.7	1600lm	> 80	65	20	8.8/9.8	35.5*34*25
LF00E030	178*55*134mm	30W	≥ 0.9	2400lm	> 80	65	20	12.6/13.2	40*35.5*31
LF00E050	208*55*154mm	50W	≥ 0.9	4000lm	> 80	65	10	8.3/8.6	35.5*23.5*35
LF00E070	253*55*189mm	70W	≥ 0.9	5600lm	> 80	65	10	12.3/12.7	56*35.5*22
LF00E010S	114*75*149mm	10W	≥ 0.5	800lm	> 80	54	20	7.4/7.9	35.5*27*34
LF00E020S	162*74*147mm	20W	≥ 0.7	1600lm	> 80	54	20	5.4/5.9	37*34*22
LF00E030S	178*74*189mm	30W	≥ 0.9	2400lm	> 80	54	20	14.8/15.5	40*35.5*42
LF00E050S	208*74*209mm	50W	≥ 0.9	4000lm	> 80	54	10	8.2/9.6	46*35.5*24



Power Source: 220-240V/AC
Detection Range: 120°
Power Frequency: 50/60Hz
Working Temperature: -20~+40°C
Ambient Light: <10-2000LUX (adjustable)
Working Humidity: <93%RH
Time-Delay: min: 10sec±3sec
max: 7min±2min
Installation Height: 1.8m~2.5m
Detection Motion Speed: 0.6~1.5m/s
Rated Load: 100W (led lamp)
Detection Distance: 2-10m (<24°C)

Model	Product Size (L*W*H)	Power	PF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFP010	120*100*25mm	10W	> 0.5	1000±10%lm	> 80	66	20	5.6/6.2	30*18*23
LFP020	120*100*25mm	20W	> 0.7	2000±10%lm	> 80	66	20	5.6/6.2	30*18*23
LFP030	140*125*30mm	30W	> 0.9	3000±10%lm	> 80	66	20	8.2/9.0	33.4*19.5*27.4
LFP050	180*160*30mm	50W	> 0.9	5000±10%lm	> 80	66	20	11.2/12.5	41*19.5*36
LFP100	250*220*35mm	100W	> 0.9	10000±10%lm	> 80	66	10	10/11.35	47*24.5*27
LFP150	300*280*35mm	150W	> 0.9	15000±10%lm	> 80	66	10	16/18.1	48*29.5*33.5
LFP030S	200*120*40mm	30W	> 0.9	3000±10%lm	> 80	44	20	8.2/9	44*29.5*28
LFP050S	240*160*40mm	50W	> 0.9	5000±10%lm	> 80	44	20	11.2/12.5	52*29.5*36
LFP100S	300*220*40mm	100W	> 0.9	10000±10%lm	> 80	44	10	10/11.35	48*29.5*34
LFP150S	365*265*40mm	150W	> 0.9	15000±10%lm	> 80	44	10	16/18.1	57*29.5*28



Including light source of energy efficiency class



DIE-CASTING ALU + GLASS



120° LIGHT ANGLE



-25°C ~ +50°C



30000h



AC220~240V
50/60HZ



BLACK




TERMINUS

CE RoHS ErP



Voltage Input: AC220-240V, 50/60Hz
Detection Angle: 120°
Detection Distance: 8±2M (<22°C)
Delay Time: 10±3sec~10±2min (Adjustable)
Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
Working Temperature: -10°C ~ +40°C
Working Humidity: ≤93%RH
Maximum Load: 220V/AC
Recommend height of installation: 1.8~2.5M



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFG010	98*28*70mm	10W	≥ 0.5	800lm	> 80	65	60	7.5/8.5	38*32*21
LFG020	118*28*90mm	20W	≥ 0.7	1600lm	> 80	65	40	8.4/9.6	38*26*24.5
LFG030	148*28*121mm	30W	≥ 0.9	2400lm	> 80	65	40	13/15	38*32*29.5
LFG050	178*28*150mm	50W	≥ 0.9	4000lm	> 80	65	20	10.5/11.5	38*19.5*36
LFG070	218*30*180mm	70W	≥ 0.9	5600lm	> 80	65	20	14.6/15.8	45*37*21
LFG100	250*30*219mm	100W	≥ 0.9	8000lm	> 80	65	10	11/12	38*26.5*25.5
LFG150	330*35*275mm	150W	≥ 0.9	12000lm	> 80	65	5	7.3/8.3	35*22*25.5
LFG200	390*35*310mm	200W	≥ 0.9	16000lm	> 80	65	5	10.5/11.5	40.5*22*29
LFG300	470*320*60mm	300W	≥ 0.9	24000lm	> 80	65	2	10/10.5	49.5*15*34
LFG400	550*400*60mm	400W	≥ 0.9	32000lm	> 80	65	2	15/15.6	57*15*42
LFG020S	118*48*169mm	20W	≥ 0.7	1600lm	> 80	44	24	7.8/8.2	35*31.5*25
LFG030S	148*48*200mm	30W	≥ 0.9	2400lm	> 80	44	20	10.5/11.5	42*31.5*32.5
LFG050S	178*48*225mm	50W	≥ 0.9	4000lm	> 80	44	10	14.5/15.5	48*31.5*37.5
LFG070S	218*43*255mm	70W	≥ 0.9	5600lm	> 80	44	10	9.5/10.5	53*29*24
LFG100S	252*48*295mm	100W	≥ 0.9	8000lm	> 80	44	10	13/13.5	53*31.5*27



APOLLO 10



Including light source of energy efficiency class



DIE-CASTING ALU + GLASS



120° LIGHT ANGLE



-25°C ~ +50°C





30000h



AC220~240V
50/60HZ



Voltage Input: AC220-240V, 50/60Hz
Detection Angle: 110°
Detection Distance: 0.5~10M (<22°C)
Delay Time: 8±3sec~10±2min (Adjustable)
Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
Working Temperature: -10°C ~ +40°C
Working Humidity: ≤93%RH
Maximum Load: 220V/AC
Recommend height of installation: 1.8~2.5M



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFJ010	92*67*26.7mm	10W	≥ 0.5	1000lm	> 80	65	60	9.3/11.2	47.5*27*27.5
LFJ020	111.6*76.6*28mm	20W	≥ 0.7	2000lm	> 80	65	40	8.2/9.8	52.5*28.5*21
LFJ030	136.6*96.6*28mm	30W	≥ 0.9	3000lm	> 80	65	40	12.5/14.5	52.5*34.5*25
LFJ050	188*133.7*28mm	50W	≥ 0.9	5000lm	> 80	65	20	11.4/13	44.5*27*32
LFJ070	224.6*154.6*29mm	70W	≥ 0.5	7000lm	> 80	65	16	13.2/14.8	42*27*36
LFJ100	270.6*190.6*31mm	100W	≥ 0.7	10000lm	> 80	65	8	10/11.3	46.5*32*22.5
LFJ150	316.6*226.6*33mm	150W	≥ 0.9	15000lm	> 80	65	6	10.9/12.8	38*37.5*27
LFJ200	351.6*256.6*35mm	200W	≥ 0.9	20000lm	> 80	65	4	9.8/11.3	41*25.5*30
LFJ010S	92*123*57mm	10W	≥ 0.5	1000lm	> 80	44	40	9.2/11.4	47.5*37*31
LFJ020S	112*133*58mm	20W	≥ 0.7	2000lm	> 80	44	30	8.6/10.6	42*37*33
LFJ030S	136.6*152*59mm	30W	≥ 0.9	3000lm	> 80	44	20	7.8/9.6	37*33.5*37
LFJ050S	189*188*58mm	50W	≥ 0.9	5000lm	> 80	44	10	6.2/7.7	44.5*37*23

F

Including light source of energy efficiency class



DIE-CASTING ALU + GLASS



120° LIGHT ANGLE



-25 °C ~ +50 °C



50000h



**AC220~240V
50/60HZ**

5
YEARS WARRANTY



APOLLO Q

CE RoHS ErP



Voltage Input: AC220-240V, 50/60Hz
Detection Angle: 110°
Detection Distance: 0.5~10M (<22 °C)
Delay Time: 8±3sec~10±2min (Adjustable)
Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
Working Temperature.: -10 °C ~ +40° C
Working Humidity.: ≤93%RH
Maximum Load : 220V/AC
Recommend height of installation: 1.8~2.5M



Model	Product Size (L*W*H)	Power	PF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFM030	111*145*35mm	30W	> 0.9	3600lm	> 80	65	30	12.1/13.8	40.5*24.5*32
LFM050	162*206*36mm	50W	> 0.9	6900lm	> 80	65	20	14.1/16.0	52.5*35.5*21.5
LFM100	212*267*44mm	100W	> 0.9	12500lm	> 80	65	8	11.4/13.0	45.5*24*29.5
LFM150	263*329*45mm	150W	> 0.9	20000lm	> 80	65	6	13.2/14.8	38.5*27.5*34
LFM200	285*45*46mm	200W	> 0.9	26000lm	> 80	65	4	12.3/13.9	38*30*33
LFM300	314*390*50mm	300W	> 0.9	39000lm	> 80	65	2	8.9/10.4	47*22.5*42.5
LFM030S	115*189*53mm	30W	> 0.9	3900lm	> 80	44	20	9.2/11.0	53.5*32*23
LFM050S	155*235*59mm	50W	> 0.9	6500lm	> 80	44	10	7.6/9.0	35.5*34.5*27.5



SETTABLE CCT:




Voltage Input: AC220-240V, 50/60Hz
 Detection Angle: 120°
 Detection Distance: 8±2M (< 22°C)
 Delay Time: 10±3sec~10±2min (Adjustable)
 Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
 Working Temperature: -10°C ~ +40°C
 Working Humidity: ≤93%RH
 Maximum Load: 220V/AC
 Recommend height of installation: 1.8~2.5M

How to use CCT function:

- ① Press once: 3000K;
- ② Press twice: 4000K;
- ③ Press thrice: 5000K;

Automatic Memory Function will be activated after 15 seconds (only record the latest color temperature that used before it is turned off)

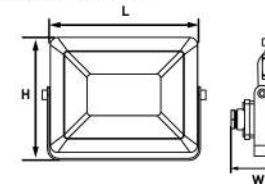

Model	Product Size (L*W*H)	Power	PF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LF00E020-CCT15W	147*55*107mm	15W	> 0.9	1200lm	> 80	65	20	8.8/9.8	35.5*34*25
LF00E030-CCT30W	178*55*134mm	30W	> 0.9	2400lm	> 80	65	20	12.6/13.2	40*35.5*31
LF00E050-CCT50W	208*55*154mm	50W	> 0.9	4000lm	> 80	65	10	8.3/8.6	35.5*23.5*35
LF00E070-CCT70W	253*55*189mm	70W	> 0.9	5600lm	> 80	65	10	12.3/12.7	56*35.5*22
LF00E100-CCT100W	253*55*189mm	100W	> 0.9	8000lm	> 80	65	10	12.3/12.7	56*35.5*22
LF00E020S-CCT15W	162*74*147mm	15W	> 0.9	1200lm	> 80	54	20	5.4/5.9	37*34*22
LF00E030S-CCT30W	178*74*189mm	30W	> 0.9	2400lm	> 80	54	20	14.8/15.5	40*35.5*42
LF00E050S-CCT50W	208*74*209mm	50W	> 0.9	4000lm	> 80	54	10	8.2/9.6	46*35.5*24

LED SOLAR LIGHT

CE  RoHS



3
YEARS WARRANTY



DIE-CASTING ALU+PC



120° LIGHT ANGLE



-25°C ~ +50°C



30000h



BLACK



Remote Control Function:

- 1- Brightness increase / decrease gradually
- 2- 100% brightness / 50% brightness
- 3- Auto; Timing 3 / 5 / 8 hours light off



Ternary lithium batteries: 18650 type



Panel Type: Polycrystalline silicon
monocrystalline silicon

BRAND NEW
TERNARY LITHIUM
BATTERIES

INSIDE



Model	Product Size (D*H)	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
SLFT050	200*226*30mm	50W	600lm	80	65	6V/8W	180*220*16mm	3.7V/5Ah	5 hrs	15 hrs	5	1.57/8.85	27*27*21.5
SLFT100	200*226*30mm	100W	1000lm	80	65	6V/10W	235*350*16mm	3.7V/10Ah	5 hrs	15 hrs	5	1.78/10.10	29.5*27*40
SLFT150	200*226*30mm	150W	1500lm	80	65	6V/15W	350*290*16mm	3.7V/15Ah	5 hrs	15 hrs	5	2.01/11.55	40*27*32.5
SLFT200	286*258*30mm	200W	2000lm	80	65	6V/20W	350*350*16mm	3.7V/20Ah	5 hrs	15 hrs	5	2.52/14.20	39*29.5*40
SLFT300	286*258*30mm	300W	3000lm	80	65	6V/30W	530*350*16mm	3.7V/30Ah	5 hrs	15 hrs	5	3.05/17.25	58*27*38.5

 DIE-CASTING ALU+PC

 120° LIGHT ANGLE

 -25 °C ~ +50 °C

 30000h

 WHITE



Up & Down Light

Full Light

Left & Right Light



Detection Angle: 120°
 Detection Distance: 8±2M (<22°C)
 Delay Time: 10±3sec~10±2min (Adjustable)
 Detection Range of Lumen: <10LUX ~ 2000LUX (Adjustable)
 Working Temperature.: -10 °C ~ +40 °C
 Working Humidity.: ≤93%RH
 Maximum Load : 220V/AC
 Recommend height of installation: 1.8~2.5M



Li-ion batteries: 18650 type



Panel Type: Polycrystalline silicon

Model	Product Size (D*H)	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
SLFP0K045S	150*40*177mm	45W	430lm	80	54	6V/6W	180*270mm	3.7V/ 4.4Ah	4-5 hrs	2.9 hrs	5	6.4/7.4	50.8*30.5*22.3
SLFP0K075S	150*40*177mm	75W	750lm	80	54	6V/10W	350*235mm	3.7V/ 8.8Ah	4-5 hrs	4 hrs	5	9.7/10.7	51*37.7*27



DIE-CASTING ALU+GLASS



120° LIGHT ANGLE



-25°C ~ +50°C



30000h



BLACK



USB (Micro- B)



NORMAL



PIR

BRAND NEW
LI-ION BATTERIES
BATTERIES



Ambient Light: < 100~150lux
Time Delay: 0~30sec
Rated Load: max 10W (LED)
Detection Range: 110°
Working Temp.: -20°C ~ +45°C
Working Humidity: < 93%RH
Detection Distance: 5~8M



Li-ion batteries: 18650 type



Panel Type: Polycrystalline
silicon

Model	Product Size (D*H)	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
SLFR02 - PIR	150*40*177mm	2W	200lm	80	65	5V/1W	127*6.2mm	3.7V/1.8Ah	9h	5-8h	40	3.8/4.8	35*35*20
SLFR08 - PIR	150*40*177mm	8W	850lm	80	65	5V/1W	127*6.2mm	3.7V/2.6Ah	13h	150/180times 30s/time	40	3.8/4.8	35*35*20
SLFR16 - PIR	150*40*177mm	16W	1600lm	80	65	5V/1W	127*6.2mm	3.7V/3Ah	15h	120times 30s/time	40	3.8/4.8	35*35*20
SLFR02 - USB	150*40*177mm	2W	200lm	80	20	5V/1W	127*6.2mm	3.7V/1.8Ah	9h	5h	40	3.8/4.8	35*35*20
SLFR08 - USB	150*40*177mm	8W	850lm	80	20	5V/1W	127*6.2mm	3.7V/2.6Ah	13h	1h	40	3.8/4.8	35*35*20
SLFR16 - USB	150*40*177mm	16W	1600lm	80	20	5V/1W	127*6.2mm	3.7V/3Ah	15h	50min	40	3.8/4.8	35*35*20
SLFR02 - NR	150*40*177mm	2W	200lm	80	65	5V/1W	127*6.2mm	3.7V/1.8Ah	9h	5h	40	3.8/4.8	35*35*20
SLFR08 - NR	150*40*177mm	8W	850lm	80	65	5V/1W	127*6.2mm	3.7V/2.6Ah	13h	1h	40	3.8/4.8	35*35*20
SLFR16 - NR	150*40*177mm	16W	1600lm	80	65	5V/1W	127*6.2mm	3.7V/3Ah	15h	50min	40	3.8/4.8	35*35*20



ABS+PC



120° LIGHT ANGLE



-25°C ~ +50°C



30000h



WHITE BLACK



Li-ion batteries: 18650 type



Panel Type: Polycrystalline silicon


BRAND NEW
LI-ION BATTERIES



High efficiency solar panel




Highlight LED




Induction




Folding



Design atmosphere lamp



Induction



SENSOR



Li-ion inclusive



Model	Product Size	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
JSFWL1-20	190*130*102mm	20W	200lm	70	44	6V/2W	119*93mm	3.7V / 1.5Ah	5 hrs	6-8 hrs	20	7.3/8.0	42*28.5*31
JSFWL1-40	190*180*101mm	40W	340lm	70	44	6V/4W	167*93mm	3.7V / 1.8Ah	5 hrs	6-8 hrs	20	9.8/10.5	42*38.5*31
JSFWL1-60	190*230*101mm	60W	420lm	70	44	6V/6W	219*93mm	3.7V / 3.0Ah	5 hrs	6-8 hrs	20	12.7/13.4	48.5*42*31



ABS+PC



120° LIGHT ANGLE



-25℃ ~ +50℃



30000h



WHITE BLACK



Li-ion batteries: 18650 type



Panel Type: Polycrystalline silicon

BRAND NEW
LI-ION BATTERIES



High efficiency solar panel

Induction

Highlight LED




LED SOLAR LIGHT



Design atmosphere lamp



Folding



Model	Product Size	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
JSFWL2-20	190*95*90mm	20W	260lm	70	44	6V/2W	114*54mm	3.7V / 1.5Ah	5 hrs	6-8 hrs	20	4.7/5.4	44.5*22*28.5
JSFWL2-40	225*115*105mm	40W	360lm	70	44	6V/4W	134*64mm	3.7V / 1.8Ah	5 hrs	6-8 hrs	20	6.4/7.1	49.5*25*33
JSFWL2-60	255*135*125mm	60W	420lm	70	44	6V/6W	157*74mm	3.7V / 3.0Ah	5 hrs	6-8 hrs	20	9.3/10	55.5*29*38.5



ABS+PMMA



120° LIGHT ANGLE



-25°C ~ +50°C



30000h



BLACK

BRAND NEW
LI-ION BATTERIES



Functions:

Normal: Work for 6 hrs / Work for 12 hrs/Off

CW-WW: Work for 6 hrs(CW) / Work for 12 hrs (CW)
/ Work for 6 hrs(WW) / Work for 12 hrs (WW) /Off

RGBW: Colors change shortly/Colors change
circularly(brightness change available)

Photocell ambient lux: 15-30lux

The product can fit for wireless
remote control, or IR remote control



Li-ion batteries: 18650 type



Panel Type: Polycrystalline
silicon

Model	Product Size	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
YSLG03	128.5*126.7*306.0mm	1W	70lm	70	44	5.5V/1.2W	115*80mm	3.7V 1.2Ah	5-10 hrs	6-12 hrs	50	17	52*47.5*27
YSLG03-CW-WW	128.5*126.7*306.0mm	1W	/	/	44	5.5V/1.2W	115*80mm	3.7V 1.2Ah	5-10 hrs	6-12 hrs	50	17	52*47.5*27
YSLG03-RGBW	128.5*126.7*306.0mm	1W	/	/	44	5.5V/1.2W	115*80mm	3.7V 1.2Ah	5-10 hrs	6-12 hrs	50	17	52*47.5*27
YSLG04	170*106*415mm	1W	80lm	70	44	5.5V/1.5W	100*120mm	3.7V 1.2Ah	5-10 hrs	6-12 hrs	30	21.5	57*47*33
YSLG04-CW-WW	170*106*415mm	1W	/	/	44	5.5V/1.5W	100*120mm	3.7V 1.2Ah	5-10 hrs	6-12 hrs	30	21.5	57*47*33
YSLG04-RGBW	170*106*415mm	1W	/	/	44	5.5V/1.5W	100*120mm	3.7V 1.2Ah	5-10 hrs	6-12 hrs	30	21.5	57*47*33



ABS+PC



110° LIGHT ANGLE



-25°C ~ +50°C



30000h



WHITE BLACK

Installation Options:

- 1- Ground mounting
- 2- Wall mounting

BRAND NEW
LI-ION BATTERIES



LED SOLAR LIGHT

Control Mode:

- 1- PIR on - light for 30 seconds;
- 2- Low light 90lm / PIR on - light for 30 seconds;
- 3- PIR off - Low light 90lm;
- 4- PIR on - SOS



Li-ion batteries: 18650 type



Panel Type: Polycrystalline silicon

Model	Product Size	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
BSLF01	180*145*125mm	8W	850lm	80	54	5.5V/1.5W	141*84mm	3.7V / 2.4Ah	8-10h	PIR ON - for 140 times (full light) Low light for 11 hrs	8	4.2/4.7	42.5*31*27
BSLF02	180*145*125mm	16W	1500lm	80	54	5.5V/1.5W	141*84mm	3.7V / 3.6Ah	8-10h	PIR ON - for 140 times (full light) Low light for 11 hrs	8	4.2/4.7	42.5*31*27



PC



120° LIGHT ANGLE



-25 °C ~ +50 °C



30000h



WHITE YELLOW BLUE PINK

More custom colours available



Li-ion batteries: 18650 type

BRAND NEW
LI-ION BATTERIES



Panel Type: Polycrystalline silicon



You can select different modes and dim by pressing button.



USB recharge (Max.2A)
Mobile phone & Pad USB charging (Max.2A)

Lighting Function:

Mode 1: Short press

1st press front LED on, 2nd press bottom LED on, 3th press LED off.

Mode 2: Long press

In each mode can be dimmed by long press.



Dimming

Model	Product Size	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
YWL01	172*225*42mm	3W+1W	100lm/w	80	20	5V/ 2W	145*145mm	3.7V 3.6Ah	10-12 hrs	5 hrs	20	12/13	51*38*29



ABS+PC



120° LIGHT ANGLE



-25℃ ~ +50℃



30000h



BLACK



LFP batteries: 18650 type



Panel Type: monocrystalline silicon



Floor mounted installation



Wall mounted installation



Optional RGB mode



Pattern design can be customized

Model	Product Size (D*H)	Power	Luminous	Ra	IP	Solar Panel	Solar Panel Size	Battery Capacity	Solar Charging Time	Lighting Time	Function	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
SLFU01	104*60.5*168.5mm	0.6W	90lm	80	65	5.5V/1.5W	138*82mm	3.2V/1.8Ah	4-6 hrs	13 hrs	Rotary type	48	14.4/15.5	54.5*47*22.5
SLFU02	104*60.5*168.5mm	0.6W	90lm	80	65	5.5V/1.5W	138*82mm	3.2V/1.8Ah	4-6 hrs	13 hrs	Normal type	48	14.4/15.5	54.5*47*22.5

LED Work Light

CE RoHS ErP





Anti-UV

Including light source of energy efficiency class



PC + IRON



-25℃ ~ +50℃



30000h

AC TYPE



Including

1. one power outlet (max. 1800W)
2. grip handle on top
3. cord winder to store cable(optional)
4. on/off switch
5. 1.8m H07RN-F 1.5MM2 cable and European plug

DC TYPE



Including


1. one battery indicator
2. grip handle on top
3. cord winder to store cable(optional)
4. on/off switch
5. one 21V 1A adapter

Function

1. High lumen: 3000lm (2.7 hrs)
2. Low lumen: 900lm (9 hrs)




Lithium Battery: 18650 type
18.5V 4400mAh

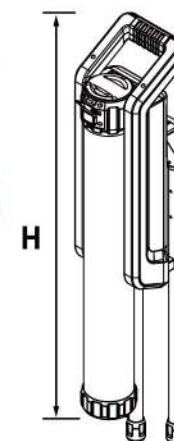

Model	Product Size (L*W*H)	Power	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
WLC030-DC	220x175x750mm	30W	3000lm	> 80	44	2	8.4/9.9	77*45.5*19
WLC070	220x175x890mm	70W	7000lm	> 80	54	2	8/9.5	91*45.5*19




OPTION




LED WORK LIGHT

Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LF0ZE020	255x213x60mm	20W	> 0.7	1600lm	> 80	44	10	9.75/11.78	46*32*38
LF0ZE030	285x243x60mm	30W	> 0.9	2400lm	> 80	44	10	11.25/13.28	52*37*32
LF0ZE050	285x273x60mm	50W	> 0.9	4000lm	> 80	44	10	13.09/15.11	57*37.5*32



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LF0ZA020	270x222x60mm	20W	> 0.7	1600lm	> 80	44	14	12.2/15.5	59*48*31
LF0ZA030	330x250x60mm	30W	> 0.9	2400lm	> 80	44	10	13.8/17.2	55*48*37
LF0ZA050	370x280x60mm	50W	> 0.9	4000lm	> 80	44	10	15.6/19.9	60*49*41



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
LFPZK020	237x205x60mm	20W	> 0.7	1400lm	> 80	44	10	5.6/9.13	40*23.5*50
LF0ZK030	270x235x60mm	30W	> 0.9	2100lm	> 80	44	10	8/11.12	51.5*40*29.5
LF0ZK050	305x280x60mm	50W	> 0.9	3500lm	> 80	44	10	11/13.46	45*30.8*64

LED Bulkhead Light

CE  RoHS ErP



Lumitek
LED LIGHTING





light source of
energy efficiency class



PC + PP + ABS



120° LIGHT ANGLE



-25°C ~ +50°C



30000h



AC220~240V
50/60HZ



BLACK

WHITE

GREY



BHB17080
BHB26150



BHB17081
BHB26151



BHB17082
BHB26152




BHB17080S
BHB26150S



BHB17081S
BHB26151S



BHB17082S
BHB26152S



Model	Product Size (D*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
BHB17080	Φ170*57	8W	0.5	560lm	> 80	65	24	4.8/5.2	40*36.3*36.3
BHB17081	Φ170*57	8W	0.5	400lm	> 80	65	24	5.04/5.55	40*36.3*36.3
BHB17082	Φ170*61	8W	0.5	400lm	> 80	65	24	5.28/5.78	40*36.3*36.3
BHB26150	Φ260*84	15W	0.7	1050lm	> 80	65	16	11.2/12.2	54.3*39*54.3
BHB26151	Φ260*84	15W	0.7	900lm	> 80	65	16	11.6/12.6	54.3*39*54.3
BHB26152	Φ260*90	15W	0.7	750lm	> 80	65	16	11.9/12.9	54.3*39*54.3
BHB17080S	Φ170*57	8W	0.5	560lm	> 80	65	24	5.52/6.02	40*36.3*36.3
BHB17081S	Φ170*57	8W	0.5	400lm	> 80	65	24	5.76/6.26	40*36.3*36.3
BHB17082S	Φ170*61	8W	0.5	400lm	> 80	65	24	6/6.5	40*36.3*36.3
BHB26150S	Φ260*84	15W	0.7	1050lm	> 80	65	16	11.7/12.2	54.3*39*54.3
BHB26151S	Φ260*84	15W	0.7	900lm	> 80	65	16	12/12.6	54.3*39*54.3
BHB26152S	Φ260*90	15W	0.7	750lm	> 80	65	16	12.4/12.9	54.3*39*54.3

F
light source of
energy efficiency class

 PC + PP


 120° LIGHT ANGLE

 -25°C ~ +50°C

 30000h

 AC220~240V
50/60HZ

 WHITE



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP
BL205EP05	205*105*54 mm	12W	≥ 0.7	960lm	> 80	54
BL170CP05	Φ170*50mm	12W	≥ 0.7	960lm	> 80	54
BL200CP05	Φ200*55mm	20W	≥ 0.7	1600lm	> 80	54
BL260EP05	260*135*58 mm	18W	≥ 0.7	1440lm	> 80	54
BL140CP05	Φ140*48mm	8W	≥ 0.5	640lm	> 80	54
BL160EP05	160*90*51mm	8W	≥ 0.5	640lm	> 80	54

F
light source of
energy efficiency class

 **PC + PP**


 **120° LIGHT ANGLE**

 **-25°C ~ +50°C**

 **30000h**

 **AC220~240V
50/60HZ**

 **WHITE**



Model	Product Size (L*W*H)	Power	DF	Luminous	Ra	IP	PCS/CTN (pcs)	N.W./G.W. (kg)	Carton Size (cm)
BL170CP06	Φ170*76mm	12W	≥ 0.7	960lm	> 80	65	24	6.2/7.0	49.5*36*36
BL220CP06	Φ220*88mm	18W	≥ 0.7	1440lm	> 80	65	20	8.3/9.2	48*46*46
BL270CP06	Φ270*102mm	24W	≥ 0.7	1920lm	> 80	65	16	9.6/10.5	56*40.5*56
BL190EP06	188*62*128mm	12W	≥ 0.7	960lm	> 80	65	24	5.0/5.5	41*28.5*40
BL240EP06	240*163*78 mm	15W	≥ 0.7	1200lm	> 80	65	20	6.7/7.3	42.5*35*50



lumitek
LED LIGHTING



LUMITEK INTERNATIONAL CO.,LTD

A/ No.18,Lane239, Beihai Road,
Jiangbei, Ningbo, China, 315032
W/ www.lumitek-lighting.com

T/ +86-574-88165605
F/ +86-574-88165666
E/ Jacky@lumitek.cn