




2023
NEW 2024

LED LIGHTING



● LED FLOOD LIGHT




● LED SOLAR LIGHT



● LED WORK LIGHT



● LED BULKHEAD LIGHT

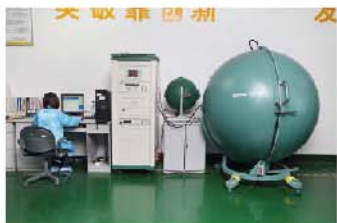

Lumitek, as the dedicated manufacturer of electrical and LED luminary products, has been evolving and innovating to stay tuned with the evolution of market and technologies since its inception in 1998.

An in-house laboratory, with all necessary testing equipment as LVD/EMC/ROHS, has been built to support our quality assurance. Automatic and semi-automatic production facilities are being introduced, combined with lean production management. Quality and cost-effective manufacturing is always our pursuit.

The technologies are changing and developing nowadays, which are highly concerned with our electrical and LED luminary industry. Our R&D team is characterized by professionalism, innovation and openness to new technologies as USB charging, smart control, energy efficiency and environment sustainability etc. Hundreds of patents, safety certificates, and industrial design awards are the proud outcomes. The integration of various resources and capabilities within and across the industry would also serve our customer needs with best possible solution.

The ever unchanged is our philosophy to create lasting value to our customers and help them to be competitive and differentiated from mass competition. Mutual sustainable developing, rather than simply buy and sell, is what we seek with our valued customers.

INDEX

LED FLOOD LIGHT

+ MACLUCE	1
MACLUCE-TY	2
MACLUCE-CCT	3
+ TYNEE	4
+ VISION ⁺	5
+ CRYSTAL2.0	6
CRYSTAL2.0-CCT	7
+ G-LIGHT	8
+ FDJ	9
+ TERMINUS	10

LED HIGH BAY

+ UFO-H3	32
+ UFO-H4	33
+ UFO-H5	34
+ UFO-A1	35

LED SOLAR LIGHT

+ SUNVISTA	11
+ GB SOLAR	12
+ SUNBEEM	13
+ SUNGLARE	14
+ SUNLUCE	15
+ SUNVARI	16
+ BUTTERFLY	17
+ SLIM	18
+ SUNCHARM	19
+ STARRY	20-22
+ SPAN	23

LED BULKHEAD LIGHT

+ STONE	36
+ LYNX PRO	37
+ SERIES 5	38
+ SERIES 6	39
+ SERIES 7	40
+ SERIES 9	41
+ SERIES 10	42

LED WORK LIGHT

+ CANNON	24
+ KC3	25
+ PLUS-R-Z	26
+ CRYSTAL-Z	27
+ ROBUST	28
+ CANDY	29
+ TITAN	30
+ CLAM	31

LED CEILING LIGHT

+ JADE SERIES	43
+ DICE SERIES	44

LED PANEL LIGHT

+ X SERIES	45
------------	----



LED FLOOD LIGHT



NEW



- Energy rating level C, 120lm/w for whole lighting;
- Curved PC cover as new design.

Specification



IP65


Die-casting
Alu+PC

AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
LFP0H015	15W	1800lm	129*34.7*112mm	≥ 0.7
LFP0H030	30W	3600lm	170*35.2*148mm	≥ 0.9
LFP0H050	50W	6000lm	210*38*177mm	≥ 0.9
LFP0H100	100W	12000lm	280*45*230mm	≥ 0.9
LFP0H015S	15W	1800lm	120*39*145mm	≥ 0.7
LFP0H030S	30W	3600lm	170*39*183mm	≥ 0.9
LFP0H050S	50W	6000lm	210*40*214mm	≥ 0.9
LFP0H100S	100W	12000lm	280*46*267mm	≥ 0.9



Anti-UV

Including light source of
energy efficiency class

TIME - 10±3sec~10±2min (Adjustable)

SENS - Sensitivity control (Adjustable)

LUX - <10LUX ~ 2000LUX (Adjustable)

Save more
space
Thinnest
as 3.5cm



NEW



Powered by
tuya
Intelligence
Inside



Bimodule




· Light changes to the rhythm of the music;

Specification



Item No.	Watt	Function	Size	DF
LFP0H024-TY	24W	RGBCW	170*35.2*148mm	≥0.7
LFP0H050-TY	50W	RGBCW	210*38*177mm	≥0.9
LFP0H100-TY	100W	RGBCW	280*45*230mm	≥0.9
LFG0H024-TY	24W	RGBCW	170*26*148mm	≥0.7
LFG0H050-TY	50W	RGBCW	210*28*177mm	≥0.9
LFG0H100-TY	100W	RGBCW	280*34*230mm	≥0.9



NEW



3 CCT adjustable
CCT 3000/4000/6500K



Anti-UV



Including light source of energy efficiency class



TIME - 10±3sec~10±2min (Adjustable)

SENS - Sensitivity control (Adjustable)

LUX - <10LUX ~ 2000LUX (Adjustable)

Specification



IP65



Die-casting Alu+PC





AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
LFP0H015-CCT	15W	1350lm	129*34.7*112mm	≥ 0.7
LFP0H030-CCT	30W	2700lm	170*35.2*148mm	≥ 0.9
LFP0H050-CCT	50W	4500lm	210*38*177mm	≥ 0.9
LFP0H100-CCT	100W	9000lm	280*45*230mm	≥ 0.9
LFP0H015S-CCT	15W	1350lm	120*39*145mm	≥ 0.7
LFP0H030S-CCT	30W	2700lm	170*39*183mm	≥ 0.9
LFP0H050S-CCT	50W	4500lm	210*40*214mm	≥ 0.9



How to use CCT function:

- ① Press once: 3000K;
- ② Press twice: 4000K;
- ③ Press thrice: 6500K;

Automatic Memory Function will be activated after 15 seconds(only record the latest color temperature that used before it is turned off)

NEW



· Curved PC cover as elegant design.

Specification



IP65

Die-casting
Alu+PC

AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
LFP0F010	10W	1000lm	105*70*102mm	≥ 0.5
LFP0F020	20W	2000lm	135*70*102mm	≥ 0.7
LFP0F030	30W	3000lm	165*70*114mm	≥ 0.9
LFP0F050	50W	5000lm	210*70*142mm	≥ 0.9
LFP0F010S	10W	1000lm	105*143*64mm	≥ 0.5
LFP0F020S	20W	2000lm	135*165*64mm	≥ 0.7
LFP0F030S	30W	3000lm	165*185*64mm	≥ 0.9
LFP0F050S	50W	5000lm	210*217*66.4mm	≥ 0.9



Anti-UV

Including light source of
energy efficiency class

TIME
+ 10±3sec~10±2min (Adjustable)

SENS
+ Sensitivity control (Adjustable)

LUX
+ <10LUX ~ 2000LUX (Adjustable)






- Curved PC cover as elegant design.
- Full light for more lighting areas.

Specification



Item No.	Watt	Lumen	Size	DF
LFP0K010	10W	800lm	105*70*102mm	≥ 0.5
LFP0K020	20W	1600lm	135*70*102mm	≥ 0.7
LFP0K030	30W	2400lm	165*72.5*114mm	≥ 0.9
LFP0K050	50W	4000lm	210*73.5*142mm	≥ 0.9
LKP0K010S	10W	800lm	105*143*64mm	≥ 0.5
LKP0K020S	20W	1600lm	135*165*64mm	≥ 0.7
LKP0K030S	30W	2400lm	165*185*64mm	≥ 0.9
LKP0K050S	50W	4000lm	210*217*66.4mm	≥ 0.9



TIME - 10±3sec~10±2min (Adjustable)

SENS - Sensitivity control (Adjustable)

LUX - <10LUX ~ 2000LUX (Adjustable)





Anti-UV



Including light source of energy efficiency class



TIME
+  - 10±3sec~10±2min (Adjustable)

SENS
+  - Sensitivity control (Adjustable)

LUX
+  - <10LUX ~ 2000LUX (Adjustable)

Specification



IP65



Die-casting
Alu+PC

AC220-240V



CRI >80

Item No.	Watt	Lumen	Size	DF
LF00E010	10W	800lm	114*51*91mm	≥ 0.5
LF00E020	20W	1600lm	147*55*107mm	≥ 0.7
LF00E030	30W	2400lm	178*55*134mm	≥ 0.9
LF00E050	50W	4000lm	208*55*154mm	≥ 0.9
LF00E070	70W	5600lm	253*55*189mm	≥ 0.9
LF00E010S	10W	800lm	114*75*149mm	≥ 0.5
LF00E020S	20W	1600lm	162*74*147mm	≥ 0.7
LF00E030S	30W	2400lm	178*74*189mm	≥ 0.9
LF00E050S	50W	4000lm	208*74*209mm	≥ 0.9

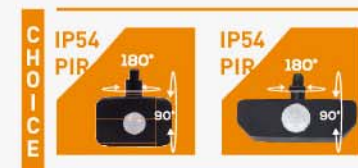

CRYSTAL2.0-CCT

NEW



- TIME**
+ 10±3sec~10±2min (Adjustable)
- SENS**
+ Sensitivity control (Adjustable)
- LUX**
+ <10LUX ~ 2000LUX (Adjustable)



IP65


Die-casting
Alu+PC

AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
LF00E020-CCT15W	15W	1200lm	114*55*107mm	≥ 0.9
LF00E030-CCT30W	30W	2400lm	178*55*134mm	≥ 0.9
LF00E050-CCT50W	50W	4000lm	208*55*154mm	≥ 0.9
LF00E070-CCT70W	70W	5600lm	253*55*189mm	≥ 0.9
LF00E100-CCT100W	100W	8000lm	253*55*189mm	≥ 0.9
LF00E020S-CCT15W	15W	1200lm	162*74*147mm	≥ 0.9
LF00E030S-CCT30W	30W	2400lm	178*74*189mm	≥ 0.9
LF00E050S-CCT50W	50W	4000lm	208*74*209mm	≥ 0.9



How to use CCT function:

- ① Press once: 3000K;
- ② Press twice: 4000K;
- ③ Press thrice: 5000K;

Automatic Memory Function will be activated after 15 seconds(only record the latest color temperature that used before it is turned off)

NEW



· Junction box included for easy wire connection

Specification



IP65

Die-casting
Alu+PC

AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
ALWA010	10W	900lm	105*118*52mm	≥ 0.5
ALWA020	20W	1800lm	120*143*53mm	≥ 0.7
ALWA030	30W	2700lm	139*173*53mm	≥ 0.9
ALWA050	50W	4500lm	191*211*54mm	≥ 0.9
ALWA100	100W	9000lm	263*244*63mm	≥ 0.9

Item No.	Watt	Lumen	Size	DF
ALWA010S	10W	900lm	105*137*84mm	≥ 0.5
ALWA020S	20W	1800lm	120*153*84mm	≥ 0.7
ALWA030S	30W	2700lm	139*173*85mm	≥ 0.9
ALWA050S	50W	4500lm	191*210*85mm	≥ 0.9
ALWA100S	100W	9000lm	263*243*88mm	≥ 0.9

F

Including light source of
energy efficiency class

+ TIME



10±3sec~10±2min (Adjustable)

+ SENS




Sensitivity control (Adjustable)

+ LUX



<5LUX ~ 2000LUX (Adjustable)



Terminal block

NEW

- **BRIGHT SMD LED**
Extremely bright LEDs with high efficiency and long lifetime.
- **VENTILATION PLUG**
One-way ventilation plug helps getting moisture out of the light.
- **PLUG-IN PIR SENSOR**
Offer an optional PLUG-IN PIR sensor for users.
- **EASY INSTALLATION**
Offer an optional PLUG-IN PIR sensor for users.



F

Including light source of energy efficiency class



- + **TIME** - 10±3sec-10±2min (Adjustable)
- + **SENS** - Sensitivity control (Adjustable)
- + **LUX** - <10LUX - 2000LUX (Adjustable)

Specification



IP65


Die-casting
Alu+PC

AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
LFP0J010	10W	800lm	90*65*28mm	≥ 0.5
LFP0J020	20W	1600lm	110*90*28mm	≥ 0.7
LFP0J030	30W	2400lm	140*120*28mm	≥ 0.9
LFP0J050	50W	4000lm	175*140*28mm	≥ 0.9
LFP0J100	100W	8000lm	260*215*30mm	≥ 0.9
LFP0J020S	20W	1600lm	110*90*28mm	≥ 0.7
LFP0J030S	30W	2400lm	140*120*28mm	≥ 0.9
LFP0J050S	50W	4000lm	175*140*28mm	≥ 0.9
LFP0J100S	100W	8000lm	260*215*30mm	≥ 0.9



bended bracket



ventilation plug





F

Including light source of energy efficiency class



TIME
+  10±3sec-10±2min (Adjustable)

SENS
+  Sensitivity control (Adjustable)

LUX
+  <10LUX ~ 2000LUX (Adjustable)

Specification



IP65

Die-casting
Alu+PC


AC220-240V



>80

Item No.	Watt	Lumen	Size	DF
LFG010	10W	800lm	98*28*70mm	≥ 0.5
LFG020	20W	1600lm	118*28*90mm	≥ 0.7
LFG030	30W	2400lm	148*28*121mm	≥ 0.9
LFG050	50W	4000lm	178*28*150mm	≥ 0.9
LFG070	70W	5600lm	218*30*180mm	≥ 0.9
LFG100	100W	8000lm	250*30*219mm	≥ 0.9
LFG150	150W	12000lm	330*35*310mm	≥ 0.9
LFG200	200W	16000lm	390*35*310mm	≥ 0.9
LFG300	300W	24000lm	470*320*60mm	≥ 0.9

Item No.	Watt	Lumen	Size	DF
LFG400	400W	32000lm	550*400*60mm	≥ 0.9
LFG020S	20W	1600lm	118*48*169mm	≥ 0.7
LFG030S	30W	2400lm	148*48*200mm	≥ 0.9
LFG050S	50W	4000lm	178*48*225mm	≥ 0.9
LFG070S	70W	5600lm	218*43*255mm	≥ 0.9
LFG100S	100W	8000lm	252*48*295mm	≥ 0.9



LED SOLAR LIGHT



NEW




· HIGH QUALITY BATTERY

Brand new battery for long lifetime.

· DIMMING & TIMING

Dimming & Timing adjustable by remote controller

BRAND NEW

Ternary Lithium BATTERIES



Remote Control Function:

- 1- Brightness increase / decrease gradually
- 2- 100% brightness / 50% brightness
- 3- Auto; Timing 3 / 5 / 8 hours light off

Specification



IP65



Die-casting
Alu+PC



Ternary Lithium
battery 18650



> 80



Monocrystalline
Silicon

Item No.	Watt	Lumen	Size	Battery	Panel	Charging Time	Working Time
LM-SF006	50W	500lm	150*120*30mm	3.7V/5Ah	6V/8W	5 hrs	15 hrs
LM-SF007	100W	1000lm	210*180*30mm	3.7V/10Ah	6V/15W	5 hrs	15 hrs
LM-SF008	200W	2000lm	280*240*30mm	3.7V/20Ah	6V/20W	5 hrs	15 hrs



3
YEARS WARRANTY

BRAND NEW
Ternary Lithium BATTERIES



Remote Control Function:

- 1- Brightness increase / decrease gradually
- 2- 100% brightness / 50% brightness
- 3- Auto; Timing 3 / 5 / 8 hours light off

Specification



IP65



Die-casting
Alu+PC



Ternary Lithium
battery 18650



CRI > 80



Monocrystalline
Silicon

Item No.	Watt	Lumen	Product Size	Battery	Panel	Charging Time	Working Time
SLFT050	50W	600lm	200*226*30mm	3.7V/5Ah	6V/8W	5 hrs	15 hrs
SLFT100	100W	1000lm	200*226*30mm	3.7V/10Ah	6V/12W	5 hrs	15 hrs
SLFT150	150W	1500lm	200*226*30mm	3.7V/15Ah	6V/20W	5 hrs	15 hrs
SLFT200	200W	2000lm	286*258*30mm	3.7V/20Ah	6V/20W	5 hrs	15 hrs
SLFT300	300W	3000lm	286*258*30mm	3.7V/30Ah	6V/20W	5 hrs	15 hrs






Specification



Item No.	Watt	Lumen	Size	Battery	Panel	Charging Time
LM-SF009	50W	500lm	249*163*70mm	3.2V/5Ah	6V/7W	7 hrs
LM-SF010	100W	900lm	273*188*73mm	3.2V/10Ah	6V/9W	7 hrs
LM-SF011	200W	1500lm	273*188*73mm	3.2V/15Ah	6V/12W	11 hrs
LM-SF012	300W	2500lm	311*225*75mm	3.2V/25Ah	6V/18W	11 hrs

Functions



Bended bracket



Ventilation plug


REPLACEABLE BATTERY

Replace the battery easily.

VENTILATION PLUG

Ensure IP rating for the products.

Specification



IP65



Alu+PC



LiFePo₄ battery
32700



CRI > 70



Monocrystalline
Silicon

Item No.	Watt	Lumen	Size	Battery	Panel	Charging Time
LM-SF013	50W	600lm	226*155*46mm	3.2V/5Ah	6V/7W	5-6 hrs
LM-SF014	100W	1000lm	226*155*46mm	3.2V/10Ah	6V/12W	5-6 hrs
LM-SF015	200W	1500lm	243*178*48mm	3.2V/15Ah	6V/16W	5-6 hrs
LM-SF016	300W	2000lm	283*208*48mm	3.2V/20Ah	6V/20W	5-6 hrs
LM-SF017	400W	2500lm	283*208*48mm	3.2V/25Ah	6V/24W	5-6 hrs


Remote Control Function:

- 1- Brightness increase / decrease gradually
- 2- 100% brightness / 50% brightness
- 3- Auto; Timing 3 / 5 / 8 hours light off



Ventilation plug



3
YEARS WARRANTY

• **FOLDABLE FOR CONVENIENT STORAGE**
Microwave / PIR sensor are available as options.

• **PIR SENSOR**
PIR sensor delay for 18 secs.

Specification



IP54

ABS plastic
+ alloy PCTernary Lithium
battery 18650

> 70

Polycrystalline
silicon

Item No.	Lumen	Size	Delay Time	Battery	Panel	Charging Time
LM-SW04	1000lm	146*103*34mm	18sec	3.7V/2000mA	1.7W	5-10 hrs
LM-SW06	1600lm	196*139*37mm	18sec	3.2V/4400mA	2.6W	5-10 hrs



Functions


mode 1:




mode 2:



mode 3:



mode 4:



Compact design
Thinnest 3.4cm



Replaceable
battery



Bended bracket
Install easily



3
YEARS WARRANTY

FOLDABLE FOR CONVENIENT STORAGE

Microwave / PIR sensor are available as options.

PIR SENSOR

PIR sensor delay for 18 secs.

Specification



IP54



ABS plastic
+ alloy PC



Ternary Lithium
battery 18650



CRI > 70



Polycrystalline
silicon

Item No.	Lumen	Size	Delay Time	Battery	Panel	Charging Time
LM-SW07	1000lm	163*58*130mm	18sec	3.7V/2000mA	3.6W	5-10 hrs



Separated mounted

Can be used as flashlight




Ground plug type (Pole+Spike as option)

Functions


● mode 1:



● mode 2:



● mode 3:



● mode 4:



Compact design
Easy for storage

LED SOLAR WALL LIGHT

BUTTERFLY

BRAND NEW
LI-ION BATTERIES



Specification



IP44



ABS+PC



LiFePO₄ battery
18650



CRI > 70



Polycrystalline
silicon

Item No.	Watt	Lumen	Product Size	Battery	Panel	Solar Panel Size	Charging Time	Working Time
JSFWL1-20	20W	200lm	190*130*102mm	3.7V/1.5Ah	6V/2W	119*93mm	5 hrs	6-8 hrs
JSFWL1-40	40W	340lm	190*180*101mm	3.7V/1.8Ah	6V/4W	167*93mm	5 hrs	6-8 hrs
JSFWL1-60	60W	420lm	190*230*101mm	3.7V/3.0Ah	6V/6W	219*93mm	5 hrs	6-8 hrs



Design atmosphere lamp

LED SOLAR WALL LIGHT

SLIM

BRAND NEW
LI-ION BATTERIES



Specification



IP44



ABS+PC



LiFePO₄ battery
18650



> 70



Polycrystalline
silicon

Item No.	Watt	Lumen	Product Size	Battery	Panel	Solar Panel Size	Charging Time	Working Time
J5FWL2-20	20W	260lm	190*95*90mm	3.7V/1.5Ah	6V/2W	114*54mm	5 hrs	6-8 hrs
J5FWL2-40	40W	360lm	225*115*105mm	3.7V/1.8Ah	6V/4W	134*64mm	5 hrs	6-8 hrs
J5FWL2-60	60W	420lm	255*135*125mm	3.7V/3.0Ah	6V/6W	157*74mm	5 hrs	6-8 hrs




Design atmosphere lamp






Functions

mode 1:



mode 2:



mode 3:



Specification



IP65



PC+ABS

Li-ion
battery

CRI >80

Item No.	Lumen	Size	Battery	Charging Time
LM-SW09	1000lm	195*105*55mm	3.7V 1800mAh	5hrs
LM-SW10	500lm	120*130*55mm	3.7V 1500mAh	5hrs



Portable



Easy for installation



Button

NEW



3 Modes can be used via switch:

Mode A: Touch the switch to turn on the light at 35lm;

Mode B: Touch the switch to move on the light at 140lm;

Mode C: Touch the switch to move on the light at 330lm.

Specification



IP44



Plastic+PC diffuser



Li-ion battery



CRI > 80

Item No.	Lumen	Size	Power	Battery	Charging Time	Working Time
LM-SG002	Max. 330lm	145*145*182mm	3W	4x1200mAh	7-8 hrs	10 hrs
LM-SG004	Max. 330lm	135*135*182mm	3W	4x1200mAh	7-8 hrs	10 hrs

STARRY

NEW



Specification



IP44



S/S+PC diffuser



Li-ion battery



>80

Item No.	Lumen	Product Size	Power	Battery	Charging Time	Working Time	Detection Range
LM-SG007	55lm	120*90*110mm	0.5W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG008	55lm	174*98*500mm	0.5W	1x1200mAh	7-8 hrs	10 hrs	10±2m

STARRY

NEW



3 Modes can be used:

- Mode A:** The light always on at 60lm when it's dark;
- Mode B:** The light always on at 60lm; It will last 25s at 240lm during the motion detected, and return back to 60lm if no motion detected in 25s;
- Mode C:** The light always on about 600lm, and will off if no motion detected in 25seconds.

Specification



IP44



Alu+PC diffuser



Li-ion battery



CRI > 80

Item No.	Lumen	Product Size	Power	Battery	Charging Time	Working Time	Detection Range
LM-SG009	Max. 600lm	135*135*223mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG010	Max. 600lm	135*135*500mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG011	Max. 600lm	188*225*100mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG012	Max. 600lm	180*180*500mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG013	Max. 600lm	160*170*185mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG014	Max. 600lm	160*160*500mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG015	Max. 600lm	150*175*185mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m
LM-SG016	Max. 600lm	150*150*500mm	4.4W	1x1200mAh	7-8 hrs	10 hrs	10±2m

NEW



PIR Modes

mode 1:




mode 2:



Normal Modes

mode 1:



mode 2:



Specification



IP65



PC



Li-ion battery



CRI > 80

Item No.	Lumen	Product Size	Battery	Charging Time	Working Time	Detection Range
YLST-A	PIR mode: Max. 950lm; Normal mode: Max. 600lm;	195*70*430mm	3.7V 5400mAh	6-8 hrs	2 rainy days	4-6m



PIR sensor



Button

Replaceable
batteries

LED WORK LIGHT





Anti-UV



Including light source of energy efficiency class



AC TYPE


Including

1. one power outlet (max. 1800W)
2. grip handle on top
3. cord winder to store cable(optional)
4. on/off switch
5. 1.8m H07RN-F 1.5MM2 cable and European plug

Specification



Item No.	Watt	Lumen	Size	DF
WLC070	70W	7000lm	220*175*890mm	≥ 0.9





Dimming
100% ~ 50% ~ 0
brightness



Specification



IP54



PA6



Input: 5V 1A
Output: 5V 2A




>80



Li-ion
battery

Item No.	Watt	Lumen	Size	Battery	Charging Time	Working Time
KWL03-1	10W	800lm	175*48*125mm	3.7V 4000mAh	5hrs	4-5 hrs
KWL03-2	20W	1600lm	175*53*125mm	3.7V 6600mAh	5hrs	4-7 hrs



**Convenient
storage**



USB

PLUS-R -Z



Including light source of
energy efficiency class



Specification




IP44

Die-casting
Alu+PC+IRONAC220-240V
50/60HZ

>80

Item No.	Watt	Lumen	Size	DF
LF0ZA020	20W	1600lm	270*222*60mm	>0.7
LF0ZA030	30W	2400lm	330*250*60mm	>0.9
LF0ZA050	50W	4000lm	370*280*60mm	>0.9





Specification




IP44

Die-casting
Alu+PC+IRONAC220-240V
50/60HZ

>80

Item No.	Watt	Lumen	Size	DF
LF0ZE020	20W	1600lm	255*213*60mm	>0.7
LF0ZE030	30W	2400lm	285*243*60mm	>0.9
LF0ZE050	50W	4000lm	285*273*60mm	>0.9



Softlux



Anti-UV

Including light source of
energy efficiency class

OPTION



NEW



with USB ports
and battery
indicator



Adjust bright-
ness by power
button
25%~ 50%
~100%~OFF

Specification



IP54

Die-casting
Alu+PC

Output: 5V 2A



CRI >80

Li-ion
battery

Item No.	Watt	Lumen	Size	Battery	Charging Time	Working Time
ZWLA015	15W	Max.1400lm	165*145*47mm	3.7V 5200mAh	4-5hrs	Max. 8 hrs
ZWLA030	30W	Max.3000lm	215*183*55mm	3.7V 8000mAh	4-4.5 hrs	Max. 8 hrs
ZWLA050	50W	Max.5000lm	288*232*75mm	11.1V 5200mAh	5-5.5 hrs	Max. 8 hrs

NEW



with USB ports
and battery
indicator



Adjust bright-
ness by power
button
100%-50%-25%
-OFF

Specification



IP44



Nylon+ABS



Input: 5V 2A
Output: 5V 2A



>80



Li-ion
battery

Item No.	Watt	Lumen	Size	Battery	Charging Time	Working Time
YWLA01	10W	Max.1000lm	170*100*90mm	3.7V 4000mAh	4-5hrs	Max. 8 hrs
YWLA02	10W	Max.1000lm	170*100*90mm	3.7V 2600mAh	4-4.5 hrs	Max. 5 hrs



TITAN

NEW



CCT
3000/4500/
6500K



Dimming
100% / 50%
brightness



Specification



IP54



Alu+ABS



AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
LM-WLD100	2x50W	Max.2x5000lm	Max.1890*620*730mm	≥0.9



NEW



Specification

 IP54
  Alu+ABS
  AC220-240V
  CRI > 80

Item No.	Watt	Lumen	Size	DF
KWL04A	64W+2X32W	11000lm	630*185*275mm	≥0.9
KWL04B	64W+2X32W	11000lm	900*900*1750mm	≥0.9

LED HIGH BAY





Specification



IP65

Dia-casting
Alu+PCAC100-240V
AC110-240V

>80

Item No.	Power	Lumen	Product Size	DF
LHBH03-100	100W	10000lm	Φ271*90mm	≥ 0.9
LHBH03-150	150W	15000lm	Φ310*90mm	≥ 0.9
LHBH03-200	200W	20000lm	Φ380*90mm	≥ 0.9

UFO-H4



Specification



IP65

Dia-casting
Alu+PC

AC100-277V



CRI > 80

Item No.	Power	Lumen	Product Size	DF
LHBH04-100	100W	20000lm	Φ275*119mm	≥ 0.9
LHBH04-150	150W	30000lm	Φ320*122mm	≥ 0.9
LHBH04-200	200W	40000lm	Φ380*123mm	≥ 0.9



Specification



IP65

Dia-casting
Alu+PC

AC100-277V



CRI > 80

Item No.	Power	Lumen	Product Size	DF
LHBH05-100	100W	10000lm	Φ236*90mm	≥ 0.9
LHBH05-150	150W	15000lm	Φ270*90mm	≥ 0.9
LHBH05-200	200W	20000lm	Φ330*90mm	≥ 0.9



Specification



IP65

Dia-casting
Alu+PC

AC220-240V



CRI > 80

Item No.	Power	Lumen	Product Size	DF
SLHBH100	100W	10000lm	Φ260*70mm	≥ 0.9
SLHBH150	150W	15000lm	Φ295*70mm	≥ 0.9
SLHBH200	200W	20000lm	Φ335*70mm	≥ 0.9

LED BULKHEAD LIGHT



lumitek
LED LIGHTING



STONE

NEW



- Frame is replaceable as options ;
- Junction box is in the back for cable connection;
- Cable outlet holes are reserved for DIY cable connection.

Specification



IP65



PC+PC+ABS



AC220-240V



CRI >80

Item No.	Watt	Lumen	Size
BHD17E081	8W	510lm	170*100*60mm
BHD22E151	15W	975lm	220*125*60mm
BHD17E080	8W	660lm	170*100*55mm
BHD22E150	15W	1225lm	220*125*55mm
BHD16C081	8W	510lm	Φ160*60mm
BHD22C151	15W	975lm	Φ215*60mm
BHD16C080	8W	660lm	Φ160*55mm
BHD22C150	15W	1225lm	Φ215*55mm

With
Junction box



BHB17080
BHB26150



BHB17081
BHB26151



BHB17082
BHB26152




BHB17080S
BHB26150S



BHB17081S
BHB26151S



BHB17082S
BHB26152S



Specification



IP65



PC+PP+ABS



AC220-240V
50/60HZ



>80

Item No.	Watt	Lumen	Product Size	DF	PCS/CTN	N.W/G.W	Carton Size
BHB17080	8W	560lm	Φ170*57mm	0.5	24	4.8/5.2kg	40*36.3*36.3cm
BHB17081	8W	400lm	Φ170*57mm	0.5	24	5.04/5.55kg	40*36.3*36.3cm
BHB17082	8W	400lm	Φ170*61mm	0.5	24	5.28/5.78kg	40*36.3*36.3cm
BHB26150	15W	1050lm	Φ260*84mm	0.7	16	11.2/12.2kg	54.3*39*54.3cm
BHB26151	15W	900lm	Φ260*84mm	0.7	16	11.6/12.6kg	54.3*39*54.3cm
BHB26152	15W	750lm	Φ260*90mm	0.7	16	11.9/12.9kg	54.3*39*54.3cm
BHB17080S	8W	560lm	Φ170*57mm	0.5	24	5.52/6.02kg	40*36.3*36.3cm
BHB17081S	8W	400lm	Φ170*57mm	0.5	24	5.76/6.26kg	40*36.3*36.3cm

Item No.	Watt	Lumen	Product Size	DF	PCS/CTN	N.W/G.W	Carton Size
BHB17082S	8W	400lm	Φ170*61mm	0.5	24	6/6.5kg	40*36.3*36.3cm
BHB26150S	15W	1050lm	Φ260*84mm	0.7	16	11.7/12.2kg	54.3*39*54.3cm
BHB26151S	15W	900lm	Φ260*84mm	0.7	16	12/12.6kg	54.3*39*54.3cm
BHB26152S	15W	750lm	Φ260*90mm	0.7	16	12.4/12.9kg	54.3*39*54.3cm



F

Including light source of
energy efficiency class

Specification



IP54




PC+PP

AC220-240V
50/60HZ

CRI >80

Item No.	Watt	Lumen	Size	DF
BL205EP05	12W	960lm	205*105*54mm	≥ 0.7
BL170CP05	12W	960lm	Φ170*50mm	≥ 0.7
BL200CP05	20W	1600lm	Φ200*55mm	≥ 0.7
BL260EP05	18W	1440lm	260*135*58mm	≥ 0.7
BL140CP05	8W	640lm	Φ140*48mm	≥ 0.5
BL160EP05	8W	640lm	160*90*51mm	≥ 0.5





Including light source of
energy efficiency class



Specification



IP65




PC+PP

AC220-240V
50/60HZ

CRI > 80

Item No.	Watt	Lumen	Product Size	DF	PCS/CTN	N.W/G.W	Carton Size
BL170CP06	12W	960lm	Φ170*76mm	≥ 0.7	24	6.2/7.0kg	49.5*36*36cm
BL220CP06	18W	1440lm	Φ220*88mm	≥ 0.7	20	8.3/9.2kg	48*46*46cm
BL270CP06	24W	1920lm	Φ270*102mm	≥ 0.7	16	9.6/10.5kg	56*40.5*56cm
BL190EP06	12W	960lm	188*62*128mm	≥ 0.7	24	5.0/5.5kg	41*28.5*40cm
BL240EP06	15W	1200lm	240*163*78mm	≥ 0.7	20	6.7/7.3kg	42.5*35*50cm



Terminal block

NEW

BL170CP07A
BL230CP07ABL170CP07B
BL230CP07BBL170CP07C
BL230CP07CBL170CP07D
BL230CP07D

F

Including light source of
energy efficiency class

Specification



IP65



PP+PC+ABS




AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
BL170CP07A	12W	840lm	Φ170*60mm	≥ 0.7
BL170CP07B	12W	840lm	Φ170*60mm	≥ 0.7
BL170CP07C	12W	840lm	Φ170*60mm	≥ 0.7
BL170CP07D	12W	840lm	Φ170*60mm	≥ 0.7
BL230CP07A	18W	1260lm	Φ230*79mm	≥ 0.7
BL230CP07B	18W	1260lm	Φ230*79mm	≥ 0.7
BL230CP07C	18W	1260lm	Φ230*79mm	≥ 0.7
BL230CP07D	18W	1260lm	Φ230*79mm	≥ 0.7



Terminal block

NEW



BL200C09



BL210EP09A



BL210EP09B

F

Including light source of
energy efficiency class

Specification



IP65



PC+ABS





AC220-240V



CRI > 80

Item No.	Watt	Lumen	Size	DF
BL200C09	18W	1440lm	Φ205*90mm	≥ 0.7
BL210EP09A	11W	880lm	212*118*95mm	≥ 0.7
BL210EP09B	11W	880lm	212*118*95mm	≥ 0.7



Terminal block

SERIES 10



BL135CP10
BL180CP10



BL165EP10
BL215EP10



BL135CP10-S
BL180CP10-S



BL165EP10-S
BL215EP10-S

F

Including light source of
energy efficiency class



Specification



IP65



PP





AC220-240V




> 80

Item No.	Watt	Lumen	Product Size	DF
BL135CP10	8W	840lm	138*135*48mm	≥ 0.5
BL180CP10	15W	1200lm	183*180*50mm	≥ 0.7
BL165EP10	8W	840lm	168*92*48mm	≥ 0.5
BL215EP10	15W	1200lm	218*113*50mm	≥ 0.7



LED CEILING LIGHT

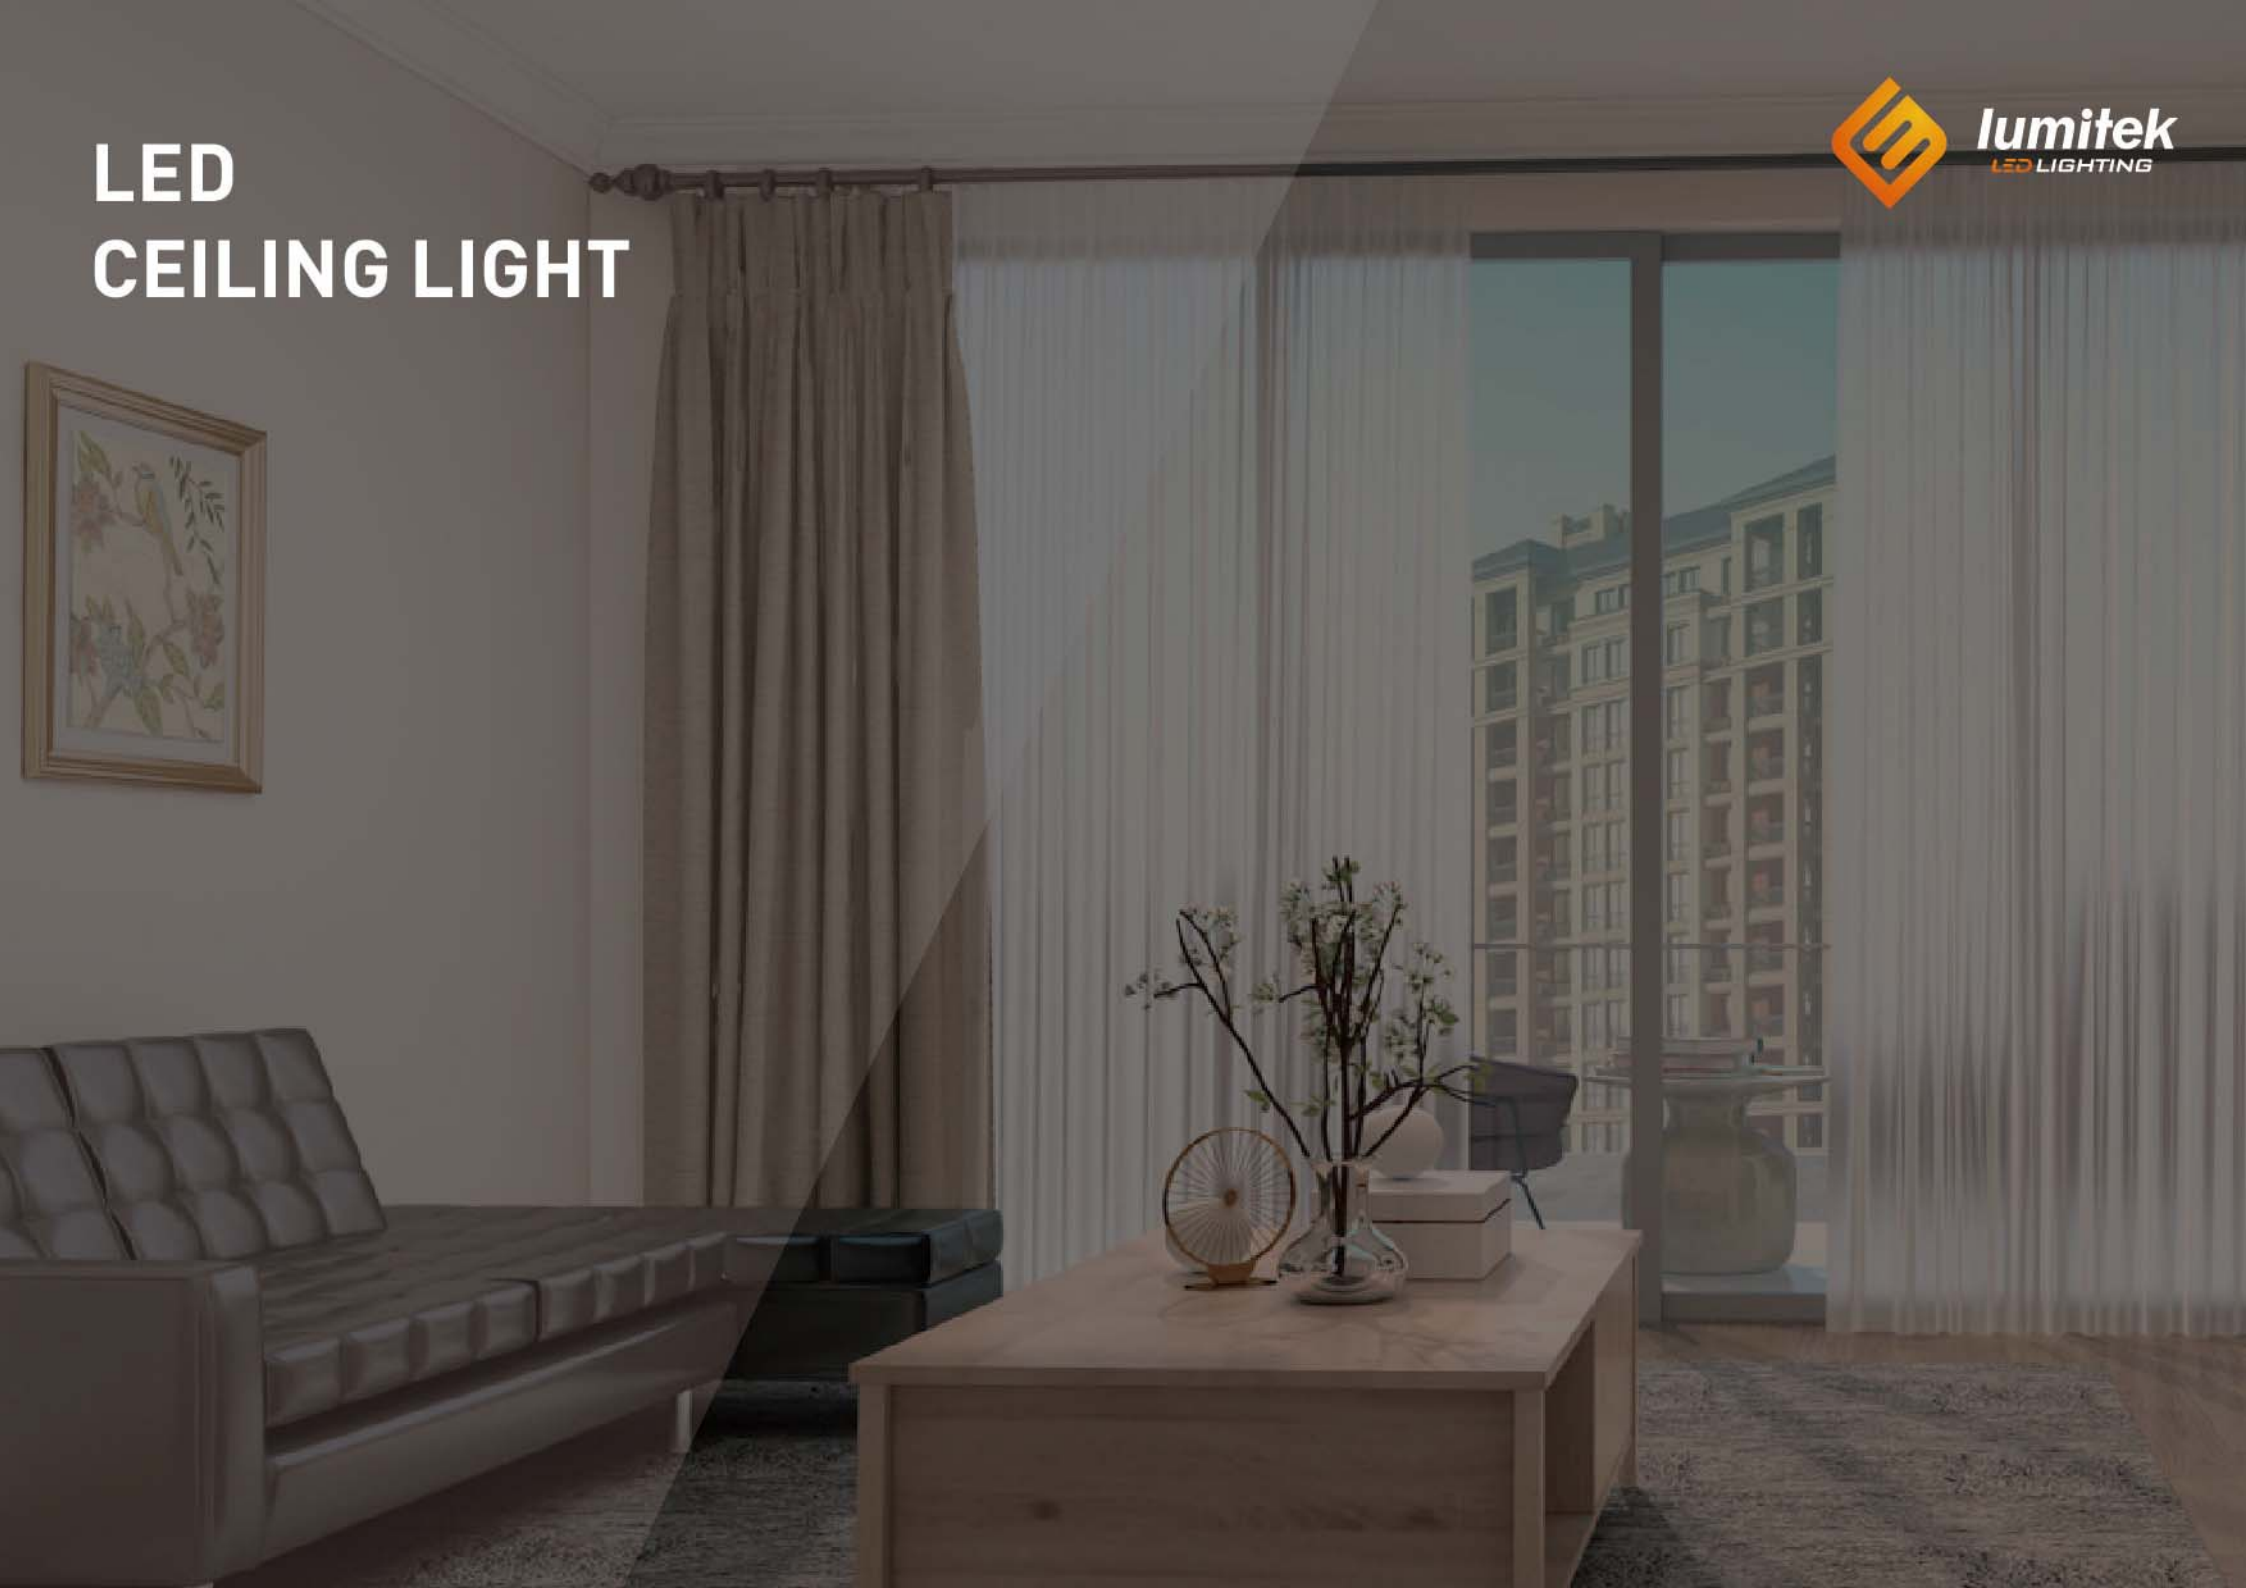

JADE SERIES

NEW



CCT
3000/4000/
6500K



Easy installation



Specification



IP44



Plastic+PC diffuser



AC220-240V



CRI > 80

Item No.	Power	Lumen	Product Size	DF
GCL-A18	18W	1440lm	Φ250X65mm	≥ 0.7
GCL-A18M	18W	1440lm	Φ250X65mm	≥ 0.7
GCL-A18-CCT	18W	1440lm	Φ250X65mm	≥ 0.7
GCL-B24	24W	1920lm	Φ350X65mm	≥ 0.7
GCL-B24-CCT	24W	1920lm	Φ350X65mm	≥ 0.7
GCL-B32	32W	2560lm	Φ350X65mm	≥ 0.9
GCL-B32-CCT	32W	2560lm	Φ350X65mm	≥ 0.9
GCL-C36	36W	2880lm	Φ450X65mm	≥ 0.9

Item No.	Power	Lumen	Product Size	DF
GCL-C36-CCT	36W	2880lm	Φ450X65mm	≥ 0.9
GCL-C45	45W	3600lm	Φ450X65mm	≥ 0.9
GCL-C45-CCT	45W	3600lm	Φ450X65mm	≥ 0.9



Junction box inside



DICE SERIES

NEW



Specification



Item No.	Power	Lumen	Product Size	DF
CCLR-A15	15W	1500lm	Φ220*50mm	≥ 0.5
CCLR-A18	18W	1800lm	Φ280*50mm	≥ 0.7
CCLR-A24	24W	2400lm	Φ330*50mm	≥ 0.7
CCLR-A40	40W	4000lm	Φ400*55mm	≥ 0.9
CCLS-A15	15W	1500lm	Φ220*50mm	≥ 0.5
CCLS-A18	18W	1800lm	Φ280*50mm	≥ 0.7
CCLS-A24	24W	2400lm	Φ330*50mm	≥ 0.7
CCLS-A40	40W	4000lm	Φ400*55mm	≥ 0.9



Faster terminal

LED PANEL LIGHT



lumitek
LED LIGHTING





Recessed type

Ceiling type



Specification

IP20



PC



AC220-240V



CRI > 80

Item No.	Power	Lumen	Product Size	DF
PLR-4W	4W	400lm	Φ95 × H 14.8mm	≥ 0.5
PLR-6W	6W	600lm	Φ128 × H 14.8mm	≥ 0.5
PLR-9W	9W	900lm	Φ145 × H 15.8mm	≥ 0.5
PLR-12W	12W	1200lm	Φ170 × H 15.8mm	≥ 0.7
PLR-18W	18W	1800lm	Φ225 × H 16mm	≥ 0.7
PLR-24W	24W	2400lm	Φ300 × H 16.3mm	≥ 0.7
PLR-30W	30W	3000lm	Φ300 × H 16.3mm	≥ 0.9
PLS--4W	4W	400lm	Φ95 × H 14.8mm	≥ 0.5

Item No.	Power	Lumen	Product Size	DF
PLS--6W	6W	600lm	Φ120 × H 14.8mm	≥ 0.5
PLS--9W	9W	900lm	Φ145 × H 15.8mm	≥ 0.5
PLS--12W	12W	1200lm	Φ170 × H 15.8mm	≥ 0.7
PLS--18W	18W	1800lm	Φ225 × H 16mm	≥ 0.7
PLS--24W	24W	2400lm	Φ300 × H 16.3mm	≥ 0.7
PLS--30W	30W	3000lm	Φ300 × H 16.3mm	≥ 0.9

3
CCT
adjustable

CCT
3000/4000/
6000K





LUMITEK INTERNATIONAL CO.,LTD

A/ No.18,Lane239, Beihai Road,
Jiangbei, Ningbo, China, 315032
W/ www.lumitek-lighting.com

T/ +86-574-88165605
F/ +86-574-88165666
E/ Jacky@lumitek.cn